PERIPHERAL U.S. PRODUCT CATALOG



TABLE OF CONTENTS

| DIRECTIONAL ATHERECTOMY SYSTEMS HawkOne™ Directional Atherectomy System | 4 |
|---|--------|
| TurboHawk [™] Peripheral Plaque Excision System | 4 5 |
| DRUG-COATED BALLOON IN.PACT™Admiral™ Paclitaxel-Coated PTA Balloon Catheter | 7 |
| EMBOLIC PROTECTION | |
| SpiderFX [™] Embolic Protection Device MO.MA Ultra [™] Proximal Cerebral Protection Device | |
| CTO DEVICES | |
| Viance [™] Crossing Catheter Enteer [™] Re-entry Catheter | |
| STENTS | |
| SELF-EXPANDING STENT SYSTEMS EverFlex™ Self-expanding Peripheral Stent with Entrust™ Delivery System | 17 |
| EverFlex Self-expanding Peripheral Stent System | |
| Protégé [™] EverFlex [™] Self-expanding Biliary Stent System | 15 |
| Protégé™ GPS™ Self-expanding Peripheral and Biliary Stent System | 16 |
| Protégé [™] RX Self-expanding Carotid Stent System | |
| BALLOON-EXPANDABLE STENT SYSTEM Visi-Pro™ Balloon-expandable Peripheral Stent System | 18 |
| UNMOUNTED STENTS | |
| IntraStent™ DoubleStrut LD Biliary Stent | 19 |
| IntraStent [™] Mega LD Biliary Stent | 19 |
| IntraStent [™] Max LD Biliary Stent | 19 |
| PTA BALLOONS | |
| EverCross [™] OTW PTA Balloon CatheterAdmiral Xtreme [™] PTA Balloon Catheter | 21 |
| Fortrex™ 0.035" OTW HP PTA Balloon Catheter | 232 |
| Pacific™ Plus PTA Catheter OTW 0.018" | 24 |
| Pacific™ Xtreme PTA Balloon Catheter OTW 0.018" | 25 |
| NanoCross [™] Elite 0.014" OTW PTA Balloon Catheter | 26 |
| RapidCross™ PTA Rapid Exchange Balloon Dilatation Catheter | 27 |
| Chocolate™ PTA Balloon | 28 |
| INFUSION THERAPY Cragg-McNamara™ Valved Infusion Catheters | 30 |
| ProStream™ Infusion Wires | |
| MicroMewi™ Infusion Catheters | 31 |
| SNARES | |
| Ampletz Goose Neck™ Snare Kit | 33 |
| Amplatz Goose Neck™ MicroSnare Kit Snare Replacement Catheters | 33 |
| GUIDEWIRES | |
| Wholey™ Guidewire System | 35 |
| Babywire [™] Double-ended Nitinol Guidewire | 35 |
| Nitrex™ Guidewire | 36 |
| SUPPORT CATHETERS, Y-CONNECTORS, & GUIDE CATHETERS TrailBlazer™ Support Catheter | 38 |
| TrailBlazer™ Angled Support Catheter | 38 |
| BigEasy [™] Rotating Y-connector | 39 |
| Sequel™ Rotating Double Y-connector | 39 |
| Launcher [™] Peripheral Guide Catheter | |
| BRIEF STATEMENTS & REFERENCE STATEMENTS | 40 |

DIRECTIONALATHERECTOMY SYSTEMS



HawkOne[™] Directional Atherectomy System

HawkOne™

Directional Atherectomy System

The HawkOne[™] device is the latest addition to the Medtronic directional atherectomy portfolio, which restores blood flow in PAD patients by removing plaque from blocked arteries. Just as the name implies, the HawkOne device is a comprehensive system that treats all morphologies, including severe calcium, and offers procedural efficiency with enhanced cutting, crossing, and cleaning capabilities.

| | Model Name | Reference Number | Vessel Diameter (mm) | Sheath Compatibility (F) | Crossing Profile (mm) | Working Length [†] (cm) | Effective Length** (cm) | Tip Length (cm) | Max. Cut Length (mm) | Packing Device |
|-----|---------------------------|---------------------|----------------------------|--------------------------------|-----------------------------|--|-------------------------------|-----------------------|----------------------------|-------------------|
| 7 F | HawkOne LS Standard Tip | H1-LS | 3.5 to 7.0 | 7 | 2.6 | 114 | 107 | 6.6 | 50 | • |
| 7 F | HawkOne LX Extended Tip | H1-LX | 3.5 to 7.0 | 7 | 2.6 | 114 | 104 | 9.6 | 75 | |
| 6 F | HawkOne M Standard Tip | H1-M | 3.0 to 7.0 | 6 | 2.2 | 135 | 129 | 5.9 | 40 | • |
| 6 F | HawkOne S Extended Tip | H1-S | 2.0 to 4.0 | 6 | 2.2 | 151 | 145 | 5.9 | 40 | |

Max guidewire is 0.014" for HawkOne device.

TurboHawk™

Peripheral Plaque Excision System

The TurboHawk[™] plaque excision system treats PAD by removing soft to moderately calcified plaque buildup in leg arteries. This second–generation device uses a directional cutting blade to shave plaque from the vessel — maximizing luminal gain. The plaque is captured in the nosecone and safely removed from the vessel.

| Product Name | Reference Number | Vessel Diameter (mm) | Sheath Compatibility [†] (F) | Crossing Profile (mm) | Working Length** (cm) | Effective Length ^{††} (cm) | Tip Length (cm) | Max Cut Length (mm) | Packing Device |
|-----------------|---------------------|----------------------------|---|-----------------------------|-----------------------------|---|-----------------------|---------------------------|-------------------|
| LX-M | TH-LX-M | 3.5 to 7.0 | 7/8 | 2.7 | 113 | 104 | 9.0 | 75 | • |
| SX-C | THS-SX-C | 2.0 to 4.0 | 6 | 2.2 | 135 | 129 | 5.9 | 40 | |
| SS-CL | THS-SS-CL | 2.0 to 4.0 | 6 | 2.2 | 149 | 145 | 3.9 | 20 | |

Max guidewire is 0.014" for all TurboHawk devices.

^{*}HawkOne working length — distal end end of pre-loaded flush tool, in the proximal position, to the distal end of tip.

[†]HawkOne effective length — distal end of pre-loaded flush tool, in the proximal position, to the proximal end of cutter window.

[†]Sheath compatibility — per the Instructions For Use, the large vessel devices with smooth cutter are compatible with 8 F sheaths. A physician survey of device usage indicated 7 F sheaths may have an internal diameter (ID) that will accommodate the crossing profile of the LX-M device. Data on file with manufacturer.

^{**}Working length — distal end of strain relief to the distal end of tip.

 $^{^{\}dagger\dagger} \text{Effective length}$ — distal end of strain relief to the proximal end of cutter window.

SilverHawk™

Peripheral Plaque Excision System

The first-generation SilverHawk $^{\text{\tiny M}}$ plaque excision system treats peripheral arterial disease (PAD) by removing soft-to-mild plaque buildup in leg arteries. SilverHawk system technology uses a directional cutting blade to shave plaque from the vessel — maximizing luminal gain. The plaque is captured in the nosecone and safely removed from the vessel.

| Product Name | Reference Number | Vessel Diameter (mm) | Sheath Compatibility (F) | Crossing Profile (mm) | Working Length [†] (cm) | Effective Length** (cm) | Tip Length (cm) | Max Cut Length (mm) | Packing Device |
|-----------------|---------------------|----------------------------|--------------------------------|-----------------------------|--|-------------------------------|-----------------------|---------------------------|-------------------|
| EXL | P4044 | 2.0 to 3.0 | 6 | 2.0 | 135 | 129 | 6.0 | 15 | |
| DS | P4028 | 1.5 to 2.0 | 6 | 1.9 | 135 | 132 | 2.6 | 10 | |

Max guidewire is 0.014" for all SilverHawk devices.

 $^{^\}dagger Working \, length$ — distal end of strain relief to the distal end of tip.

 $^{^{**}\}mbox{Effective length}$ — distal end of strain relief to the proximal end of cutter window.

DRUG-COATEDBALLOON



IN.PACT[™]Admiral[™] Drug-Coated Balloon

IN.PACT™Admiral™

Drug-coated Balloon

The IN.PACT $^{\text{\tiny{TM}}}$ Admiral $^{\text{\tiny{TM}}}$ Drug-coated Balloon (DCB) is a globally leading DCB used for the treatment of femoropopliteal disease. Its drug formulation provides proven safety and sustained benefit while leaving future treatment options open.

TECHNICAL SPECIFICATIONS

| Paclitaxel drug dose | 3.5 µg/mm² |
|----------------------------|--|
| Excipient | Urea |
| Balloon diameters | 4.0 mm-7.0 mm |
| Balloon lengths | 40, 60, 80, 120, 150, 200, 250 mm [†] |
| Balloon fold configuration | 4.0 mm: 3 folds 5.0, 6.0, and 7.0 mm: 6 folds |

| Catheter design | Over the wire (OTW) |
|--------------------------|---|
| Catheter lengths | 80 cm and 130 cm |
| Guidewire compatibility | 0.035" |
| Nominal balloon pressure | 8 atm: 40, 60, 80, 120, and 150 mm 5 atm: 200 and 250 mm |

 $^{^{\}dagger}$ 120, 150, 200, and 250 mm lengths are not offered on the 7.0 mm diameter balloon.

| Reference Number Usable Length 80 cm | Reference Number Usable Length 130 cm | Balloon Diameter (mm) | Balloon Length (mm) | Recommended Introducer Sheath (F) | Nominal Pressure (atm) | RBP (atm) |
|--|---|--------------------------|------------------------|---|---------------------------|--------------|
| ADM 040 040 08P | ADM 040 040 13P | 4.0 | 40 | 5 | 8 | 14 |
| ADM 040 060 08P | ADM 040 060 13P | 4.0 | 60 | 5 | 8 | 14 |
| ADM 040 080 08P | ADM 040 080 13P | 4.0 | 80 | 5 | 8 | 14 |
| ADM 040 120 08P | ADM 040 120 13P | 4.0 | 120 | 5 | 8 | 14 |
| ADM 040 150 08P | ADM 040 150 13P | 4.0 | 150 | 5 | 8 | 14 |
| ADM 040 200 08P | ADM 040 200 13P | 4.0 | 200 | 5 | 5 | 11 |
| ADM 040 250 08P | ADM 040 250 13P | 4.0 | 250 | 5 | 5 | 11 |
| ADM 050 040 08P | ADM 050 040 13P | 5.0 | 40 | 6 | 8 | 14 |
| ADM 050 060 08P | ADM 050 060 13P | 5.0 | 60 | 6 | 8 | 14 |
| ADM 050 080 08P | ADM 050 080 13P | 5.0 | 80 | 6 | 8 | 14 |
| ADM 050 120 08P | ADM 050 120 13P | 5.0 | 120 | 6 | 8 | 14 |
| ADM 050 150 08P | ADM 050 150 13P | 5.0 | 150 | 6 | 8 | 14 |
| ADM 050 200 08P | ADM 050 200 13P | 5.0 | 200 | 6 | 5 | 11 |
| ADM 050 250 08P | ADM 050 250 13P | 5.0 | 250 | 6 | 5 | 11 |
| ADM 060 040 08P | ADM 060 040 13P | 6.0 | 40 | 6 | 8 | 14 |
| ADM 060 060 08P | ADM 060 060 13P | 6.0 | 60 | 6 | 8 | 14 |
| ADM 060 080 08P | ADM 060 080 13P | 6.0 | 80 | 6 | 8 | 14 |
| ADM 060 120 08P | ADM 060 120 13P | 6.0 | 120 | 6 | 8 | 14 |
| ADM 060 150 08P | ADM 060 150 13P | 6.0 | 150 | 6 | 8 | 14 |
| ADM 060 200 08P | ADM 060 200 13P | 6.0 | 200 | 6 | 5 | 11 |
| ADM 060 250 08P | ADM 060 250 13P | 6.0 | 250 | 6 | 5 | 11 |
| ADM 070 040 08P | ADM 070 040 13P | 7.0 | 40 | 7 | 8 | 14 |
| ADM 070 060 08P | ADM 070 060 13P | 7.0 | 60 | 7 | 8 | 14 |
| ADM 070 080 08P | ADM 070 080 13P | 7.0 | 80 | 7 | 8 | 14 |

EMBOLIC PROTECTION



SpiderFX™

Embolic Protection Device

The SpiderFX $^{\text{\tiny M}}$ device is used to capture and remove debris that becomes dislodged during an interventional procedure. The SpiderFX device is the only embolic protection device that can be delivered over any 0.014" or 0.018" guidewire, or through any 0.035" catheter. The SpiderFX device has the broadest indication among distal embolic filters. It is indicated for use in carotid arteries, coronary saphenous vein bypass grafts, and lower extremity procedures.

†Lower extremity procedures.

| | | Captur | Capture Wire | | Recovery End | Guide Catheter/ Sheath | |
|---------------------|------------------------|---|-------------------------------|-----------------------------|-------------------------|---------------------------|-----------------|
| Reference Number | Filter Size (mm) | Target Vessel Size (mm) | Wire Length OTW/RX (cm) | Wire Diameter (in/mm) | Crossing Profile (F) | Diameter (F) | Minimum ID (in) |
| SPD2-US-030-190 | 3.0 | 3.0 SVG & Carotid | 190 | 0.014/0.36 | 3.2 | 4.2 | 0.066 |
| SPD2-US-030-320 | 3.0 | 3.0 SVG & Carotid | 320/190 | 0.014/0.36 | 3.2 | 4.2 | 0.066 |
| SPD2-US-040-190 | 4.0 | 3.1-4.0 SVG & Carotid | 190 | 0.014/0.36 | 3.2 | 4.2 | 0.066 |
| SPD2-US-040-320 | 4.0 | 3.1-4.0 SVG & Carotid | 320/190 | 0.014/0.36 | 3.2 | 4.2 | 0.066 |
| SPD2-US-050-190 | 5.0 | 4.1-5.0 SVG & Carotid 3.0-4.0 Lower Extremity | 190 | 0.014/0.36 | 3.2 | 4.2 | 0.066 |
| SPD2-US-050-320 | 5.0 | 4.1-5.0 SVG & Carotid 3.0-4.0 Lower Extremity | 320/190 | 0.014/0.36 | 3.2 | 4.2 | 0.066 |
| SPD2-US-060-190 | 6.0 | 4.5-6.0 SVG & Carotid 3.5-5.0 Lower Extremity | 190 | 0.014/0.36 | 3.2 | 4.2 | 0.066 |
| SPD2-US-060-320 | 6.0 | 4.5-6.0 SVG & Carotid 3.5-5.0 Lower Extremity | 320/190 | 0.014/0.36 | 3.2 | 4.2 | 0.066 |
| SPD2-US-070-190 | 7.0 | 5.5-6.0 SVG 5.5-7.0 Carotid 4.5-6.0 Lower Extremity | 190 | 0.014/0.36 | 3.2 | 4.2 | 0.066 |
| SPD2-US-070-320 | 7.0 | 5.5-6.0 SVG 5.5-7.0 Carotid 4.5-6.0 Lower Extremity | 320/190 | 0.014/0.36 | 3.2 | 4.2 | 0.066 |

MO.MA Ultra™

Proximal Cerebral Protection Device

Use the MO.MA Ultra[™] proximal cerebral protection device to contain and remove all sizes of debris that can dislodge during interventional procedures in the carotid arteries. The MO.MA Ultra device with double-occlusion balloon system allows for proximal embolic protection to be established prior to crossing a carotid lesion.

TECHNICAL SPECIFICATIONS

| Balloon material | Compliant elastomeric rubber | | | | | |
|-------------------------|--|---------------------------|--|--|--|--|
| Balloon marker distance | 6 cm | | | | | |
| Recommended guidewire | 0.035" (0.89 mm) | | | | | |
| Balloon occlusion range | 5-13 mm diameter (CCA prox. balloon) 3-6 mm diam | neter (ECA dist. balloon) | | | | |

| Reference Number | Minimum Sheath Size (F) | Inner Diameter of the Working Channel |
|------------------|-------------------------|---------------------------------------|
| MUS0130069X6 | 9 | 0.083"/2.12 mm |



Viance™

Crossing Catheter

The Viance $^{\text{T}}$ crossing catheter is designed to efficiently cross chronic total occulsions via the true lumen. The low-profile catheter, with its fast-spin torque handle, is designed to find small microchannels in a lesion, while leaving the control of crossing in the physician's hands.

| Reference Number | Description | Working Length (cm) | Guidewire Compatibility (in) | Crossing Profile (max in) | Sheath Compatibility |
|---------------------|-------------|------------------------|---------------------------------|------------------------------|----------------------|
| VNC-FX-150 | Flexible | 150 | 0.014 | 0.038 | 5 F |
| VNC-SD-150 | Standard | 150 | 0.014 | 0.038 | 5 F |

Enteer™ Re-entry System

The Enteer™ system, consisting of the Enteer re-entry balloon catheter and the Enteer guidewire, provides the physician with control to reliably target the true lumen from the subintimal channel above or below the knee. The Enteer catheter's unique balloon design self-orients toward the true lumen within the subintimal space when inflated. Offset exit ports are located on either side of the device, allowing the Enteer guidewire to reenter into the true lumen.

Re-entry Balloon Catheter


| Reference Number | | Balloon Size (W x H x L mm) | Working Length (cm) | Guidewire Compatibility (in) | Crossing Profile (max in) | Sheath Compatibility |
|---------------------|-----|--------------------------------|------------------------|---------------------------------|------------------------------|-------------------------|
| ENB-375-20-135 | ATK | 3.75 x 1.5 x 20 | 135 | ≤ 0.018 | 0.066 | 5 F |
| ENB-275-20-150 | втк | 2.75 x 1.0 x 20 | 150 | ≤ 0.018 | 0.066 | 5 F |

Guidewire

| Reference Number | Description | Diameter (in) | Length (cm) | Tip Reach (mm) |
|---------------------|-------------|------------------|----------------|-------------------|
| ENW-FX-014-300 | Flexible | 0.014 | 300 | 1.5 |
| ENW-SD-014-300 | Standard | 0.014 | 300 | 1.5 |
| ENW-SF-014-300 | Stiff | 0.014 | 300 | 2.5 |

STENTS

EverFlex[™] Self-expanding Peripheral Stent System

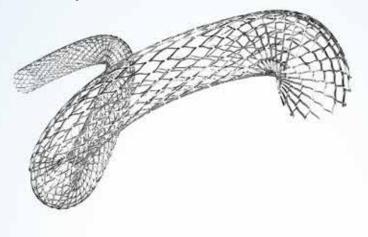



Visi-Pro[™] Balloon-expandable Peripheral Stent System

EverFlex Mark Self-expanding Peripheral Stent with **Entrust** Delivery System

The Entrust^{$^{\text{TM}}$} delivery system is a one-handed stent delivery system with a low 5 F profile. This low profile was achieved without compromising the design of the EverFlex^{$^{\text{TM}}$} stent or the 0.035" guidewire compatibility. The device was engineered specifically for control and accuracy based on physician feedback during extensive interviews and procedural observations. The device is indicated for use in the superficial femoral artery.

| | CATHETER LENGTH | | STEN | ΓSIZE | | COMPATIBILIT | Υ |
|------------------------------|-------------------------------|-------------------------------|------------------|----------------|-------------------------------------|-------------------|-------------------------------|
| 80 cm Reference Number | 120 cm Reference Number | 150 cm Reference Number | Diameter (mm) | Length (mm) | Recomm. Introducer Sheath (F) | Guidewire (in) | Recomm. Lumen Size (mm) |
| EVD35-06-020-080 | EVD35-06-020-120 | EVD35-06-020-150 | 6 | 20 | 5 | 0.035 | 4.5-5.5 |
| EVD35-06-040-080 | EVD35-06-040-120 | EVD35-06-040-150 | 6 | 40 | 5 | 0.035 | 4.5-5.5 |
| EVD35-06-060-080 | EVD35-06-060-120 | EVD35-06-060-150 | 6 | 60 | 5 | 0.035 | 4.5-5.5 |
| EVD35-06-080-080 | EVD35-06-080-120 | EVD35-06-080-150 | 6 | 80 | 5 | 0.035 | 4.5-5.5 |
| EVD35-06-100-080 | EVD35-06-100-120 | EVD35-06-100-150 | 6 | 100 | 5 | 0.035 | 4.5-5.5 |
| EVD35-06-120-080 | EVD35-06-120-120 | EVD35-06-120-150 | 6 | 120 | 5 | 0.035 | 4.5-5.5 |
| EVD35-06-150-080 | EVD35-06-150-120 | EVD35-06-150-150 | 6 | 150 | 5 | 0.035 | 4.5-5.5 |
| EVD35-07-020-080 | EVD35-07-020-120 | EVD35-07-020-150 | 7 | 20 | 5 | 0.035 | 5.5-6.5 |
| EVD35-07-040-080 | EVD35-07-040-120 | EVD35-07-040-150 | 7 | 40 | 5 | 0.035 | 5.5-6.5 |
| EVD35-07-060-080 | EVD35-07-060-120 | EVD35-07-060-150 | 7 | 60 | 5 | 0.035 | 5.5-6.5 |
| EVD35-07-080-080 | EVD35-07-080-120 | EVD35-07-080-150 | 7 | 80 | 5 | 0.035 | 5.5-6.5 |
| EVD35-07-100-080 | EVD35-07-100-120 | EVD35-07-100-150 | 7 | 100 | 5 | 0.035 | 5.5-6.5 |
| EVD35-07-120-080 | EVD35-07-120-120 | EVD35-07-120-150 | 7 | 120 | 5 | 0.035 | 5.5-6.5 |
| EVD35-07-150-080 | EVD35-07-150-120 | EVD35-07-150-150 | 7 | 150 | 5 | 0.035 | 5.5-6.5 |
| EVD35-08-020-080 | EVD35-08-020-120 | EVD35-08-020-150 | 8 | 20 | 5 | 0.035 | 6.5-7.5 |
| EVD35-08-040-080 | EVD35-08-040-120 | EVD35-08-040-150 | 8 | 40 | 5 | 0.035 | 6.5-7.5 |
| EVD35-08-060-080 | EVD35-08-060-120 | EVD35-08-060-150 | 8 | 60 | 5 | 0.035 | 6.5-7.5 |
| EVD35-08-080-080 | EVD35-08-080-120 | EVD35-08-080-150 | 8 | 80 | 5 | 0.035 | 6.5-7.5 |
| EVD35-08-100-080 | EVD35-08-100-120 | EVD35-08-100-150 | 8 | 100 | 5 | 0.035 | 6.5-7.5 |
| EVD35-08-120-080 | EVD35-08-120-120 | EVD35-08-120-150 | 8 | 120 | 5 | 0.035 | 6.5-7.5 |
| EVD35-08-150-080 | EVD35-08-150-120 | EVD35-08-150-150 | 8 | 150 | 5 | 0.035 | 6.5-7.5 |

EverFlex™

Self-expanding Peripheral Stent System

The EverFlex™ stent system is designed for flexibility and durability. It is a second-generation stent indicated for use in the superficial femoral and proximal popliteal arteries (SFA/PPA), common iliac, and/or external iliac arteries. The EverFlex stent is available in sizes ranging from 20 mm to 200 mm lengths (SFA/PPA) or 20-120 mm lengths (iliac). The broad size matrix, all deliverable through a 6 F catheter, provides the most appropriate single-stent fit. Peak-to-peak connection nodes disperse force uniformly, enhancing durability, while the spiral-cell connection and three-wave peak design optimize flexibility.

| CATHETE | R LENGTH | STEN | T SIZE | | COMPATIBILITY | |
|---------------------------|----------------------------|------------------|-------------|-------------------------------------|----------------|-------------------------------|
| Reference Number 80 cm | Reference Number 120 cm | Diameter (mm) | Length (mm) | Recomm. Introducer Sheath (F) | Guidewire (in) | Recomm. Lumen Size (mm) |
| PRB35-06-020-080 | PRB35-06-020-120 | 6 | 20 | 6 | 0.035 | 4.5-5.5 |
| PRB35-06-030-080 | PRB35-06-030-120 | 6 | 30 | 6 | 0.035 | 4.5-5.5 |
| PRB35-06-040-080 | PRB35-06-040-120 | 6 | 40 | 6 | 0.035 | 4.5-5.5 |
| PRB35-06-060-080 | PRB35-06-060-120 | 6 | 60 | 6 | 0.035 | 4.5-5.5 |
| PRB35-06-080-080 | PRB35-06-080-120 | 6 | 80 | 6 | 0.035 | 4.5-5.5 |
| PRB35-06-100-080 | PRB35-06-100-120 | 6 | 100 | 6 | 0.035 | 4.5-5.5 |
| PRB35-06-120-080 | PRB35-06-120-120 | 6 | 120 | 6 | 0.035 | 4.5-5.5 |
| PRB35-06-150-080 | PRB35-06-150-120 | 6 | 150 | 6 | 0.035 | 4.5-5.5 |
| N/A | PRB35-06-200-120 | 6 | 200 | 6 | 0.035 | 4.5-5.5 |
| PRB35-07-020-080 | PRB35-07-020-120 | 7 | 20 | 6 | 0.035 | 5.5-6.5 |
| PRB35-07-030-080 | PRB35-07-030-120 | 7 | 30 | 6 | 0.035 | 5.5-6.5 |
| PRB35-07-040-080 | PRB35-07-040-120 | 7 | 40 | 6 | 0.035 | 5.5-6.5 |
| PRB35-07-060-080 | PRB35-07-060-120 | 7 | 60 | 6 | 0.035 | 5.5-6.5 |
| PRB35-07-080-080 | PRB35-07-080-120 | 7 | 80 | 6 | 0.035 | 5.5-6.5 |
| PRB35-07-100-080 | PRB35-07-100-120 | 7 | 100 | 6 | 0.035 | 5.5-6.5 |
| PRB35-07-120-080 | PRB35-07-120-120 | 7 | 120 | 6 | 0.035 | 5.5-6.5 |
| PRB35-07-150-080 | PRB35-07-150-120 | 7 | 150 | 6 | 0.035 | 5.5-6.5 |
| N/A | PRB35-07-200-120 | 7 | 200 | 6 | 0.035 | 5.5-6.5 |
| PRB35-08-020-080 | PRB35-08-020-120 | 8 | 20 | 6 | 0.035 | 6.5-7.5 |
| PRB35-08-030-080 | PRB35-08-030-120 | 8 | 30 | 6 | 0.035 | 6.5-7.5 |
| PRB35-08-040-080 | PRB35-08-040-120 | 8 | 40 | 6 | 0.035 | 6.5-7.5 |
| PRB35-08-060-080 | PRB35-08-060-120 | 8 | 60 | 6 | 0.035 | 6.5-7.5 |
| PRB35-08-080-080 | PRB35-08-080-120 | 8 | 80 | 6 | 0.035 | 6.5-7.5 |
| PRB35-08-100-080 | PRB35-08-100-120 | 8 | 100 | 6 | 0.035 | 6.5-7.5 |
| PRB35-08-120-080 | PRB35-08-120-120 | 8 | 120 | 6 | 0.035 | 6.5-7.5 |
| PRB35-08-150-080 | PRB35-08-150-120 | 8 | 150 | 6 | 0.035 | 6.5-7.5 |
| N/A | PRB35-08-200-120 | 8 | 200 | 6 | 0.035 | 6.5-7.5 |

Each system includes one stent and delivery catheter system.

Protégé[™] EverFlex[™]

Self-expanding Biliary Stent System

The Protégé $^{\text{\tiny M}}$ EverFlex $^{\text{\tiny M}}$ stent system is designed for the palliative treatment of malignant neoplasms in the biliary tree. The stent is made of nitinol and comes pre-mounted on an over-the-wire delivery system. The proximal and distal ends of the stent have tantalum radiopaque markers for enhanced visibility.

| Reference Number | Unconstrained Stent Diameter (mm) | Unconstrained Stent Length (mm) | Rec. Lumen Size (mm) | Usable Length (cm) | Sheath Size (F) | Guidewire Acceptance (in) | Outside Diameter (in) |
|---------------------|---|---------------------------------------|-------------------------|--------------------------|--------------------|---------------------------------|-----------------------------|
| PRB35-05-020-080 | 5 | 20 | 3.5-4.5 | 80 | 6 | 0.035 | 0.079 |
| PRB35-05-020-120 | 5 | 20 | 3.5-4.5 | 120 | 6 | 0.035 | 0.079 |
| PRB35-05-030-080 | 5 | 30 | 3.5-4.5 | 80 | 6 | 0.035 | 0.079 |
| PRB35-05-030-120 | 5 | 30 | 3.5-4.5 | 120 | 6 | 0.035 | 0.079 |
| PRB35-05-040-080 | 5 | 40 | 3.5-4.5 | 80 | 6 | 0.035 | 0.079 |
| PRB35-05-040-120 | 5 | 40 | 3.5-4.5 | 120 | 6 | 0.035 | 0.079 |
| PRB35-05-060-080 | 5 | 60 | 3.5-4.5 | 80 | 6 | 0.035 | 0.079 |
| PRB35-05-060-120 | 5 | 60 | 3.5-4.5 | 120 | 6 | 0.035 | 0.079 |
| PRB35-05-080-080 | 5 | 80 | 3.5-4.5 | 80 | 6 | 0.035 | 0.079 |
| PRB35-05-080-120 | 5 | 80 | 3.5-4.5 | 120 | 6 | 0.035 | 0.079 |
| PRB35-05-100-080 | 5 | 100 | 3.5-4.5 | 80 | 6 | 0.035 | 0.079 |
| PRB35-05-100-120 | 5 | 100 | 3.5-4.5 | 120 | 6 | 0.035 | 0.079 |
| PRB35-05-120-080 | 5 | 120 | 3.5-4.5 | 80 | 6 | 0.035 | 0.079 |
| PRB35-05-120-120 | 5 | 120 | 3.5-4.5 | 120 | 6 | 0.035 | 0.079 |

Each system includes one stent and delivery catheter system.

Protégé™GPS™

Self-expanding Peripheral and Biliary Stent System

The Protégé™ GPS™ self-expanding peripheral and biliary stent system is a self-expanding, nitinol stent system indicated for the common and external iliac arteries, and designed for the palliative treatment of malignant neoplasms in the biliary tree. The stent is made of a nickel titanium alloy (nitinol) and comes pre-mounted on a 6 F over-the-wire delivery system. The stent is cut from a nitinol tube into an open lattice design and has tantalum radiopaque markers at the proximal and distal ends of the stent.

| Reference Number | Unconstrained Stent Diameter (mm) | Unconstrained Stent Length (mm) | Rec. Lumen Size (mm) | Usable Length (cm) | Sheath Size (F) | Guidewire Acceptance (in) | Outside Diameter (in) |
|---------------------|---|---------------------------------------|-------------------------|--------------------------|--------------------|---------------------------------|--------------------------|
| SERB65-09-20-80 | 9 | 20 | 7.5-8.5 | 80 | 6 | 0.035 | 0.079 |
| SERB65-09-30-80 | 9 | 30 | 7.5-8.5 | 80 | 6 | 0.035 | 0.079 |
| SERB65-09-40-80 | 9 | 40 | 7.5-8.5 | 80 | 6 | 0.035 | 0.079 |
| SERB65-09-60-80 | 9 | 60 | 7.5-8.5 | 80 | 6 | 0.035 | 0.079 |
| SERB65-09-80-80 | 9 | 80 | 7.5-8.5 | 80 | 6 | 0.035 | 0.079 |
| SERB65-10-20-80 | 10 | 20 | 8.5-9.5 | 80 | 6 | 0.035 | 0.079 |
| SERB65-10-30-80 | 10 | 30 | 8.5-9.5 | 80 | 6 | 0.035 | 0.079 |
| SERB65-10-40-80 | 10 | 40 | 8.5-9.5 | 80 | 6 | 0.035 | 0.079 |
| SERB65-10-60-80 | 10 | 60 | 8.5-9.5 | 80 | 6 | 0.035 | 0.079 |
| SERB65-10-80-80 | 10 | 80 | 8.5-9.5 | 80 | 6 | 0.035 | 0.079 |
| SERB65-12-20-80 | 12 | 20 | 9.5-11.0 | 80 | 6 | 0.035 | 0.079 |
| SERB65-12-30-80 | 12 | 30 | 9.5-11.0 | 80 | 6 | 0.035 | 0.079 |
| SERB65-12-40-80 | 12 | 40 | 9.5-11.0 | 80 | 6 | 0.035 | 0.079 |
| SERB65-12-60-80 | 12 | 60 | 9.5-11.0 | 80 | 6 | 0.035 | 0.079 |
| SERB65-12-80-80 | 12 | 80 | 9.5-11.0 | 80 | 6 | 0.035 | 0.079 |
| SERB65-09-20-120 | 9 | 20 | 7.5-8.5 | 120 | 6 | 0.035 | 0.079 |
| SERB65-09-30-120 | 9 | 30 | 7.5-8.5 | 120 | 6 | 0.035 | 0.079 |
| SERB65-09-40-120 | 9 | 40 | 7.5-8.5 | 120 | 6 | 0.035 | 0.079 |
| SERB65-09-60-120 | 9 | 60 | 7.5-8.5 | 120 | 6 | 0.035 | 0.079 |
| SERB65-09-80-120 | 9 | 80 | 7.5-8.5 | 120 | 6 | 0.035 | 0.079 |
| SERB65-10-20-120 | 10 | 20 | 8.5-9.5 | 120 | 6 | 0.035 | 0.079 |
| SERB65-10-30-120 | 10 | 30 | 8.5-9.5 | 120 | 6 | 0.035 | 0.079 |
| SERB65-10-40-120 | 10 | 40 | 8.5-9.5 | 120 | 6 | 0.035 | 0.079 |
| SERB65-10-60-120 | 10 | 60 | 8.5-9.5 | 120 | 6 | 0.035 | 0.079 |
| SERB65-10-80-120 | 10 | 80 | 8.5-9.5 | 120 | 6 | 0.035 | 0.079 |
| SERB65-12-20-120 | 12 | 20 | 9.5-11.0 | 120 | 6 | 0.035 | 0.079 |
| SERB65-12-30-120 | 12 | 30 | 9.5-11.0 | 120 | 6 | 0.035 | 0.079 |
| SERB65-12-40-120 | 12 | 40 | 9.5-11.0 | 120 | 6 | 0.035 | 0.079 |
| SERB65-12-60-120 | 12 | 60 | 9.5-11.0 | 120 | 6 | 0.035 | 0.079 |
| SERB65-12-80-120 | 12 | 80 | 9.5-11.0 | 120 | 6 | 0.035 | 0.079 |
| Biliary Only | | | | | | | |
| SERB65-14-20-80 | 14 | 20 | 11.5-13.0 | 80 | 6 | 0.035 | 0.079 |
| SERB65-14-30-80 | 14 | 30 | 11.5-13.0 | 80 | 6 | 0.035 | 0.079 |
| SERB65-14-40-80 | 14 | 40 | 11.5-13.0 | 80 | 6 | 0.035 | 0.079 |
| SERB65-14-60-80 | 14 | 60 | 11.5-13.0 | 80 | 6 | 0.035 | 0.079 |
| SERB65-14-80-80 | 14 | 80 | 11.5-13.0 | 80 | 6 | 0.035 | 0.079 |
| SERB65-14-20-120 | 14 | 20 | 11.5-13.0 | 120 | 6 | 0.035 | 0.079 |
| SERB65-14-30-120 | 14 | 30 | 11.5-13.0 | 120 | 6 | 0.035 | 0.079 |
| SERB65-14-40-120 | 14 | 40 | 11.5-13.0 | 120 | 6 | 0.035 | 0.079 |
| SERB65-14-60-120 | 14 | 60 | 11.5-13.0 | 120 | 6 | 0.035 | 0.079 |
| SERB65-14-80-120 | 14 | 80 | 11.5-13.0 | 120 | 6 | 0.035 | 0.079 |

Protégé™ RX

Self-expanding Carotid Stent System

The Protégé $^{\text{\tiny TM}}$ RX stent system is designed for carotid artery stenting. The nitinol stent comes pre-mounted on a 6 F, 0.014" rapid exchange delivery system. The proximal and distal ends of the stent have tantalum radiopaque markers for enhanced visibility.

| Reference Number | Unconstrained Stent Diameter (mm) | Unconstrained Stent Length (mm) | Recommended Lumen Size (mm) | Usable Catheter Length (cm) | Sheath Size (F) | Guidewire Acceptance (in) |
|---------------------|---|---------------------------------------|-----------------------------------|-----------------------------------|--------------------|------------------------------|
| Straight | | | | | | |
| SECX-6-20-135 | 6 | 20 | 4.5-5.5 | 135 | 6 | 0.014 |
| SECX-6-30-135 | 6 | 30 | 4.5-5.5 | 135 | 6 | 0.014 |
| SECX-6-40-135 | 6 | 40 | 4.5-5.5 | 135 | 6 | 0.014 |
| SECX-6-60-135 | 6 | 60 | 4.5-5.5 | 135 | 6 | 0.014 |
| SECX-7-20-135 | 7 | 20 | 5.5-6.5 | 135 | 6 | 0.014 |
| SECX-7-30-135 | 7 | 30 | 5.5-6.5 | 135 | 6 | 0.014 |
| SECX-7-40-135 | 7 | 40 | 5.5-6.5 | 135 | 6 | 0.014 |
| SECX-7-60-135 | 7 | 60 | 5.5-6.5 | 135 | 6 | 0.014 |
| SECX-8-20-135 | 8 | 20 | 6.5-7.5 | 135 | 6 | 0.014 |
| SECX-8-30-135 | 8 | 30 | 6.5-7.5 | 135 | 6 | 0.014 |
| SECX-8-40-135 | 8 | 40 | 6.5-7.5 | 135 | 6 | 0.014 |
| SECX-8-60-135 | 8 | 60 | 6.5-7.5 | 135 | 6 | 0.014 |
| SECX-9-20-135 | 9 | 20 | 7.5-8.5 | 135 | 6 | 0.014 |
| SECX-9-30-135 | 9 | 30 | 7.5-8.5 | 135 | 6 | 0.014 |
| SECX-9-40-135 | 9 | 40 | 7.5-8.5 | 135 | 6 | 0.014 |
| SECX-9-60-135 | 9 | 60 | 7.5-8.5 | 135 | 6 | 0.014 |
| SECX-10-20-135 | 10 | 20 | 8.5-9.5 | 135 | 6 | 0.014 |
| SECX-10-30-135 | 10 | 30 | 8.5-9.5 | 135 | 6 | 0.014 |
| SECX-10-40-135 | 10 | 40 | 8.5-9.5 | 135 | 6 | 0.014 |
| SECX-10-60-135 | 10 | 60 | 8.5-9.5 | 135 | 6 | 0.014 |
| Tapered | | | | | | |
| SECX-8-6-30-135 | 8/6 | 30 | (6.5-7.5)-(4.5-5.5) | 135 | 6 | 0.014 |
| SECX-8-6-40-135 | 8/6 | 40 | (6.5-7.5)-(4.5-5.5) | 135 | 6 | 0.014 |
| SECX-10-7-30-135 | 10/7 | 30 | (8.5-9.5)-(5.5-6.5) | 135 | 6 | 0.014 |
| SECX-10-7-40-135 | 10/7 | 40 | (8.5-9.5)-(5.5-6.5) | 135 | 6 | 0.014 |

Each system includes one stent and delivery catheter system.

Visi-Pro™

Balloon-expandable Peripheral Stent System

The Visi- $Pro^{\mathbb{T}}$ stent system is indicated for use in the common and external iliac arteries. It is made from a stainless steel tube that is cut into an open lattice design and has tantalum radiopaque markers at the proximal and distal ends of the stent. The stent is mounted (crimped) onto a tightly folded balloon catheter and expanded and deployed by inflating the balloon.

| CATHETER | R LENGTH | STEN ⁻ | Γ SIZE | BALLOON | СОМР | ATIBILITY |
|---------------------------|----------------------------|-------------------|----------------|------------------------|-------------------------------|----------------|
| Reference Number 80 cm | Reference Number 135 cm | Diameter (mm) | Length (mm) | Balloon Length (mm) | Rec. Introducer Sheath (F) | Guidewire (in) |
| PXB35-05-12-080 | - | 5 | 12 | 15 | 6 [†] | 0.035" |
| PXB35-05-17-080 | PXB35-05-17-135 | 5 | 17 | 20 | 6 [†] | 0.035" |
| PXB35-05-27-080 | PXB35-05-27-135 | 5 | 27 | 30 | 6 [†] | 0.035" |
| PXB35-05-37-080 | PXB35-05-37-135 | 5 | 37 | 40 | 6^{\dagger} | 0.035" |
| PXB35-05-57-080 | PXB35-05-57-135 | 5 | 57 | 60 | 6 [†] | 0.035" |
| PXB35-06-12-080 | - | 6 | 12 | 15 | 6^{\dagger} | 0.035" |
| PXB35-06-17-080 | PXB35-06-17-135 | 6 | 17 | 20 | 6 [†] | 0.035" |
| PXB35-06-27-080 | PXB35-06-27-135 | 6 | 27 | 30 | 6 [†] | 0.035" |
| PXB35-06-37-080 | PXB35-06-37-135 | 6 | 37 | 40 | 6 [†] | 0.035" |
| PXB35-06-57-080 | PXB35-06-57-135 | 6 | 57 | 60 | 6 [†] | 0.035" |
| PXB35-07-12-080 | - | 7 | 12 | 15 | 6 [†] | 0.035" |
| PXB35-07-17-080 | PXB35-07-17-135 | 7 | 17 | 20 | 6^{\dagger} | 0.035" |
| PXB35-07-27-080 | PXB35-07-27-135 | 7 | 27 | 30 | 6 [†] | 0.035" |
| PXB35-07-37-080 | PXB35-07-37-135 | 7 | 37 | 40 | 6^{\dagger} | 0.035" |
| PXB35-07-57-080 | PXB35-07-57-135 | 7 | 57 | 60 | 6 [†] | 0.035" |
| PXB35-08-17-080 | PXB35-08-17-135 | 8 | 17 | 20 | 6^{\dagger} | 0.035" |
| PXB35-08-27-080 | PXB35-08-27-135 | 8 | 27 | 30 | 6 [†] | 0.035" |
| PXB35-08-37-080 | PXB35-08-37-135 | 8 | 37 | 40 | 6^{\dagger} | 0.035" |
| PXB35-08-57-080 | PXB35-08-57-135 | 8 | 57 | 60 | 6 [†] | 0.035" |
| PXB35-09-17-080 | PXB35-09-17-135 | 9 | 17 | 20 | 7 | 0.035" |
| PXB35-09-27-080 | PXB35-09-27-135 | 9 | 27 | 30 | 7 | 0.035" |
| PXB35-09-37-080 | PXB35-09-37-135 | 9 | 37 | 40 | 7 | 0.035" |
| PXB35-09-57-080 | PXB35-09-57-135 | 9 | 57 | 60 | 7 | 0.035" |
| PXB35-10-17-080 | PXB35-10-17-135 | 10 | 17 | 20 | 7 | 0.035" |
| PXB35-10-27-080 | PXB35-10-27-135 | 10 | 27 | 30 | 7 | 0.035" |
| PXB35-10-37-080 | PXB35-10-37-135 | 10 | 37 | 40 | 7 | 0.035" |
| PXB35-10-57-080 | PXB35-10-57-135 | 10 | 57 | 60 | 7 | 0.035" |

[†]6 F = 0.085" I.D.


Each system includes one stent and delivery catheter system.

IntraStent[™]

Biliary Stent System

The IntraStent $^{\text{\tiny{M}}}$ biliary stent system consists of unmounted large diameter stents designed for flexiblity and strength, while remaining low profile. These stents are designed to be manually crimped onto a noncompliant PTA balloon catheter that is indicated for biliary stent expansion.

| Reference | UNEXPANDE | D STENT SIZE | EXPANDED STENT SIZE | | | | | | | |
|------------------------------------|--|--------------|---------------------|-------------|--|--|--|--|--|--|
| Number | Diameter (mm) | Length (mm) | Diameter (mm) | Length (mm) | | | | | | |
| IntraStent™ DoubleStrut LD Biliary | IntraStent™ DoubleStrut LD Biliary Stent | | | | | | | | | |
| S15-16 (90-1431-000) | 3.8 | 16.0 | 9, 10, 11, 12 | 16.0 | | | | | | |
| S15-26 (90-1431-001) | 3.8 | 26.0 | 9, 10, 11, 12 | 26.0 | | | | | | |
| S15-36 (90-1431-002) | 3.8 | 36.0 | 9, 10, 11, 12 | 36.0 | | | | | | |
| S15-56 (90-1431-003) | 3.8 | 56.0 | 9, 10, 11, 12 | 56.0 | | | | | | |
| S15-76 (90-1431-004) | 3.8 | 76.0 | 9, 10, 11, 12 | 76.0 | | | | | | |
| IntraStent™ Mega LD Biliary Stent | | | | | | | | | | |
| S17-16 (90-2313-000) | 3.8 | 16.0 | 9, 10, 11, 12 | 16.0 | | | | | | |
| S17-26 (90-2313-001) | 3.8 | 26.0 | 9, 10, 11, 12 | 26.0 | | | | | | |
| S17-36 (90-2313-002) | 3.8 | 36.0 | 9, 10, 11, 12 | 36.0 | | | | | | |
| IntraStent™ Max LD Biliary Stent | | | | | | | | | | |
| S18-16 (90-2319-000) | 4.5 | 16.0 | 12 | 16.0 | | | | | | |
| S18-26 (90-2319-001) | 4.5 | 26.0 | 12 | 26.0 | | | | | | |
| S18-36 (90-2319-002) | 4.5 | 36.0 | 12 | 36.0 | | | | | | |

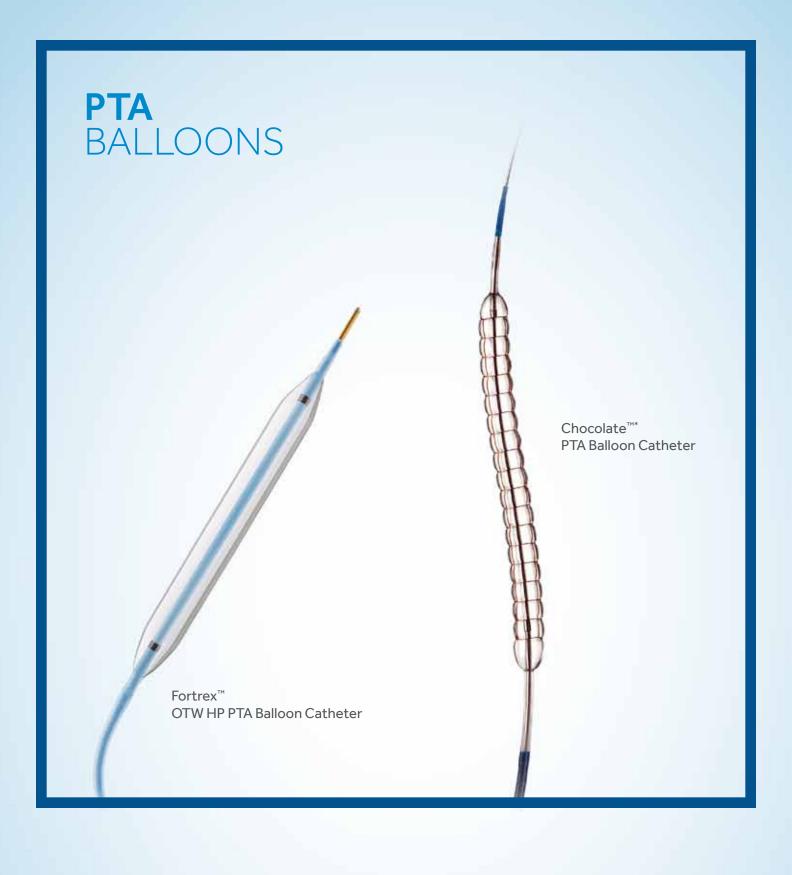

EverCrossTM

OTW PTA Balloon Catheter

The EverCross $^{\text{m}}$ balloon catheter is a 0.035" balloon that is specially designed for optimal pushability and trackability. The EverCross balloon catheter delivers both superior performance and a broad range of balloon sizes.

| Reference Number | Reference Number | Reference Number | Balloon | Balloon | Recomm. | Nominal | |
|--------------------------------|--------------------------------|--------------------------------|------------------|----------------|--------------------------|-------------------|--------------|
| Usable Length 40 cm | Usable Length 80 cm | Usable Length 135 cm | Diameter (mm) | Length (mm) | Introducer Sheath (F) | Pressure (atm) | RBP (atm) |
| 40 CIII | | | | | | | |
| - | AB35W03020080 | AB35W03020135 | 3.0 | 20 | 5 | 10 | 20 |
| - | AB35W03030080 AB35W03040080 | AB35W03030135 | 3.0 3.0 | 30 40 | 5 5 | 10 10 | 20 20 |
| <u>-</u> | AB35W03040080 | AB35W03040135 AB35W03060135 | 3.0 | 60 | 5 | 10 | 20 |
| | AB35W03080080 | AB35W03080135 | 3.0 | 80 | 5 | 10 | 20 |
| _ | AB35W03080080 AB35W03100080 | AB35W03080133 | 3.0 | 100 | 5 | 10 | 20 |
| _ | AB35W03120080 | AB35W03120135 | 3.0 | 120 | 5 | 10 | 20 |
| _ | AB35W03150080 | AB35W03150135 | 3.0 | 150 | 5 | 10 | 20 |
| _ | AB35W03200080 | AB35W03200135 | 3.0 | 200 | 5 | 10 | 20 |
| - | AB35W04020080 | AB35W04020135 | 4.0 | 20 | 5 | 10 | 20 |
| - | AB35W04030080 | AB35W04030135 | 4.0 | 30 | 5 | 10 | 20 |
| - | AB35W04040080 | AB35W04040135 | 4.0 | 40 | 5 | 10 | 20 |
| - | AB35W04060080 | AB35W04060135 | 4.0 | 60 | 5 | 10 | 20 |
| - | AB35W04080080 | AB35W04080135 | 4.0 | 80 | 5 | 10 | 20 |
| - | AB35W04100080 | AB35W04100135 | 4.0 | 100 | 5 | 10 | 20 |
| - | AB35W04120080 | AB35W04120135 | 4.0 | 120 | 5 | 10 | 20 |
| - | AB35W04150080 | AB35W04150135 | 4.0 | 150 | 5 | 10 | 20 |
| - | AB35W04200080 | AB35W04200135 | 4.0 | 200 | 5 | 10 | 20 |
| AB35W05020040 | AB35W05020080 | AB35W05020135 | 5.0 | 20 | 5 | 10 | 20 |
| AB35W05030040 | AB35W05030080 | AB35W05030135 | 5.0 | 30 | 5 | 10 | 20 |
| AB35W05040040 | AB35W05040080 | AB35W05040135 | 5.0 | 40 | 5 | 10 | 20 |
| AB35W05060040 | AB35W05060080 | AB35W05060135 | 5.0 | 60 | 5 | 10 | 20 |
| AB35W05080040 | AB35W05080080 | AB35W05080135 | 5.0 | 80 | 5 | 10 | 20 |
| - | AB35W05100080 | AB35W05100135 | 5.0 | 100 | 5 | 10 | 20 |
| AB35W05120040 | AB35W05120080 | AB35W05120135 | 5.0 | 120 | 5 | 10 | 16 |
| - | AB35W05150080 | AB35W05150135 | 5.0 | 150 | 5 | 10 | 16 |
| - A D 7 E W O C O 2 O O 4 O | AB35W05200080 | AB35W05200135 | 5.0 | 200 | 5 | 10 | 16 |
| AB35W06020040 | AB35W06020080 AB35W06030080 | AB35W06020135 AB35W06030135 | 6.0 6.0 | 20 30 | 5 5 | 8 | 14 14 |
| AB35W06040040 | AB35W06030080 AB35W06040080 | AB35W06030135 AB35W06040135 | 6.0 | 40 | 5 | 8 | 14 |
| - | AB35W06060080 | AB35W06060135 | 6.0 | 60 | 5 | 8 | 14 |
| AB35W06080040 | AB35W06080080 | AB35W06080135 | 6.0 | 80 | 5 | 8 | 14 |
| - | AB35W06100080 | AB35W06100135 | 6.0 | 100 | 5 | 8 | 14 |
| AB35W06120040 | AB35W06120080 | AB35W06120135 | 6.0 | 120 | 5 | 8 | 12 |
| - | AB35W06150080 | AB35W06150135 | 6.0 | 150 | 5 | 8 | 12 |
| - | AB35W06200080 | AB35W06200135 | 6.0 | 200 | 6 | 8 | 11 |
| AB35W07020040 | AB35W07020080 | AB35W07020135 | 7.0 | 20 | 5 | 7 | 14 |
| - | AB35W07030080 | AB35W07030135 | 7.0 | 30 | 5 | 7 | 14 |
| AB35W07040040 | AB35W07040080 | AB35W07040135 | 7.0 | 40 | 5 | 7 | 14 |
| AB35W07060040 | AB35W07060080 | AB35W07060135 | 7.0 | 60 | 6 | 7 | 14 |
| - | AB35W07080080 | AB35W07080135 | 7.0 | 80 | 6 | 7 | 14 |
| - | AB35W07100080 | AB35W07100135 | 7.0 | 100 | 6 | 7 | 14 |
| - | AB35W07120080 | AB35W07120135 | 7.0 | 120 | 6 | 7 | 10 |
| - | AB35W07150080 | AB35W07150135 | 7.0 | 150 | 6 | 7 | 10 |
| - | AB35W07200080 | AB35W07200135 | 7.0 | 200 | 6 | 7 | 10 |
| AB35W08020040 | AB35W08020080 | AB35W08020135 | 8.0 | 20 | 6 | 7 | 14 |
| - | AB35W08030080 | AB35W08030135 | 8.0 | 30 | 6 | 7 | 14 |
| AB35W08040040 | AB35W08040080 | AB35W08040135 | 8.0 | 40 | 6 | 7 | 14 |
| AB35W08060040 | AB35W08060080 | AB35W08060135 | 8.0 | 60 | 6 | 7 | 14 |
| - | AB35W08080080 | AB35W08080135 | 8.0 | 80 | 6 | 7 | 14 |
| - | AB35W09020080 | AB35W09020135 | 9.0 | 20 | 6 | 7 | 12 |
| <u>-</u> | AB35W09030080 AB35W09040080 | AB35W09030135 | 9.0 | 30 40 | 6 6 | 7 | 12 12 |
| <u>-</u> | AB35W09040080 AB35W09060080 | AB35W09040135 AB35W09060135 | 9.0 9.0 | 60 | 6 | 7 | 12 |
| <u>-</u> | AB35W09080080 | | 9.0 | 80 | 6 | 7 | 12 |
| _ | AB35W09080080 AB35W10020080 | AB35W09080135 AB35W10020135 | 10.0 | 20 | 6 | 7 | 12 |
| <u>-</u> | AB35W10020080 AB35W10030080 | AB35W10020135 AB35W10030135 | 10.0 | 30 | 6 | 7 | 11 |
| _ | AB35W10030080 AB35W10040080 | AB35W10030135 AB35W10040135 | 10.0 | 40 | 6 | 7 | 11 |
| | AB35W10040080 | AB35W10040135 AB35W10060135 | 10.0 | 60 | 7 | 7 | 11 |
| _ | AB35W12020080 | AB35W12020135 | 12.0 | 20 | 7 | 7 | 10 |
| | AB35W12020080 AB35W12040080 | AB35W12040135 | 12.0 | 40 | 7 | 7 | 10 |
| | AB35W12040080 AB35W12060080 | AB35W12040135 | 12.0 | 60 | 7 | 7 | 10 |

Admiral Xtreme™

PTA Balloon Catheter OTW 0.035"

Treat longer PAD lesions above the knee with Admiral Xtreme $^{™}$ PTA balloon catheter. Offered in 250 and 300 mm lengths, with 0.035" guidewire compatibility, featuring large inflation lumen for rapid inflation and deflation.

TECHNICAL SPECIFICATIONS

| Catheter design | Over the wire (OTW) |
|-------------------------|--|
| Balloon material | Flexitec™Xtreme |
| Balloon coating | Hydrophilic |
| Balloon marker | 2 swaged (zero profile) platinum-iridium |
| Usable shaft lengths | 80, 130 cm |
| Shaft diameter | 5 F-5.3 F |
| Guidewire compatibility | 0.035" |

| Reference Number Usable Length 80 cm | Reference Number Usable Length 130 cm | Balloon Diameter (mm) | Balloon Length (mm) | Recom. Introducer Sheath (F) | Nominal Pressure (atm) | RBP (atm) |
|--|---|-----------------------------|---------------------------|------------------------------------|---------------------------|--------------|
| ADM 040 250 080 | ADM 040 250 130 | 4.0 | 250 | 5 | 6 | 14 |
| ADM 040 300 080 | ADM 040 300 130 | 4.0 | 300 | 5 | 6 | 14 |
| ADM 050 250 080 | ADM 050 250 130 | 5.0 | 250 | 5 | 6 | 14 |
| ADM 050 300 080 L | ADM 050 300 130 L | 5.0 | 300 | 5 | 6 | 14 |
| ADM 060 250 080 L | ADM 060 250 130 L | 6.0 | 250 | 5 | 6 | 12 |
| ADM 060 300 080 L | ADM 060 300 130 L | 6.0 | 300 | 5 | 6 | 12 |
| ADM 070 250 080 | ADM 070 250 130 | 7.0 | 250 | 6 | 6 | 12 |

Fortrex™

0.035" OTW HP PTA Balloon Catheter

The Fortrex $^{\text{\tiny{M}}}$ PTA balloon is the next-generation high pressure solution for AV access, and it is also intended for use in the peripheral vascular system. Engineered specifically for peak performance at rated burst pressure, the Fortrex balloon offers the deliverability, predictability, and procedural efficiency desired by physicians.

| Reference Number Usable Length 40 cm | Reference Number Usable Length 80 cm | Reference Number Usable Length 135 mm | Balloon Diameter (mm) | Balloon Length (mm) | Nominal Pressure (atm) | Rated Burst Pressure (atm) | Recommended Introducer Sheath (F) |
|--|--|---|-----------------------------|---------------------------|------------------------------|-------------------------------------|---|
| A35HPV04020040 | A35HPV04020080 | A35HPV04020135 | 4.0 | 20 | 12 | 24 | 6 |
| A35HPV04040040 | A35HPV04040080 | A35HPV04040135 | 4.0 | 40 | 12 | 24 | 6 |
| A35HPV04080040 | A35HPV04080080 | A35HPV04080135 | 4.0 | 80 | 12 | 24 | 6 |
| A35HPV04100040 | A35HPV04100080 | A35HPV04100135 | 4.0 | 100 | 12 | 24 | 6 |
| A35HPV05020040 | A35HPV05020080 | A35HPV05020135 | 5.0 | 20 | 12 | 24 | 6 |
| A35HPV05040040 | A35HPV05040080 | A35HPV05040135 | 5.0 | 40 | 12 | 24 | 6 |
| A35HPV05080040 | A35HPV05080080 | A35HPV05080135 | 5.0 | 80 | 12 | 24 | 6 |
| A35HPV05100040 | A35HPV05100080 | A35HPV05100135 | 5.0 | 100 | 12 | 24 | 6 |
| A35HPV06020040 | A35HPV06020080 | A35HPV06020135 | 6.0 | 20 | 12 | 24 | 6 |
| A35HPV06040040 | A35HPV06040080 | A35HPV06040135 | 6.0 | 40 | 12 | 24 | 6 |
| A35HPV06080040 | A35HPV06080080 | A35HPV06080135 | 6.0 | 80 | 12 | 23 | 6 |
| A35HPV06100040 | A35HPV06100080 | A35HPV06100135 | 6.0 | 100 | 12 | 23 | 6 |
| A35HPV07020040 | A35HPV07020080 | A35HPV07020135 | 7.0 | 20 | 9 | 20 | 6 |
| A35HPV07040040 | A35HPV07040080 | A35HPV07040135 | 7.0 | 40 | 9 | 20 | 6 |
| A35HPV07080040 | A35HPV07080080 | A35HPV07080135 | 7.0 | 80 | 9 | 20 | 6 |
| A35HPV07100040 | A35HPV07100080 | A35HPV07100135 | 7.0 | 100 | 9 | 20 | 6 |
| A35HPV08040040 | A35HPV08040080 | A35HPV08040135 | 8.0 | 40 | 9 | 20 | 6 |
| A35HPV08080040 | A35HPV08080080 | A35HPV08080135 | 8.0 | 80 | 9 | 19 | 6 |
| A35HPV08100040 | A35HPV08100080 | A35HPV08100135 | 8.0 | 100 | 9 | 18 | 6 |
| A35HPV09040040 | A35HPV09040080 | A35HPV09040135 | 9.0 | 40 | 9 | 18 | 7 |
| A35HPV09080040 | A35HPV09080080 | A35HPV09080135 | 9.0 | 80 | 9 | 18 | 7 |
| A35HPV10040040 | A35HPV10040080 | A35HPV10040135 | 10.0 | 40 | 8 | 16 | 7 |
| A35HPV10080040 | A35HPV10080080 | A35HPV10080135 | 10.0 | 80 | 8 | 16 | 7 |
| A35HPV12040040 | A35HPV12040080 | A35HPV12040135 | 12.0 | 40 | 8 | 14 | 7 |
| A35HPV12080040 | A35HPV12080080 | A35HPV12080135 | 12.0 | 80 | 7 | 12 | 7 |

Pacific[™] Plus

PTA Catheter OTW 0.018"

Realize more access options when you choose the Pacific $^{^{\text{\tiny{M}}}}$ Plus PTA catheter OTW 0.018", with its versatile shaft lengths. The proprietary balloon technology allows for enhanced crossing for treating lesions and the improved shaft design speeds deflation following treatment.

TECHNICAL SPECIFICATIONS

| Catheter design | Over the wire (OTW), coaxial shaft | Usable shaft lengths | 90, 130, 150,180 cm |
|------------------|------------------------------------|---------------------------------|---------------------|
| Balloon material | Proprietary | Shaft diameter | 4 F - 5 F |
| Balloon coating | Hydrophilic | Maximum guidewire compatibility | 0.018" |
| Balloon marker | 2 swaged, platinum-iridium | | |

| Reference Number Usable Length 90 cm | Reference Number Usable Length 130 cm | Reference Number Usable Length 150 cm | Reference Number Usable Length 180 cm | Balloon Diameter (mm) | Balloon Length (mm) | Minimum Sheath Inner Diameter (F) | Nominal Pressure (atm) | RBP (atm) |
|--|---|---|---|-----------------------------|---------------------------|---|------------------------------|--------------|
| PCP 020 020 090 | PCP 020 020 130 | PCP 020 020 150 | PCP 020 020 180 | 2.00 | 20 | 4 | 8 | 22 |
| PCP 020 040 090 | PCP 020 040 130 | PCP 020 040 150 | PCP 020 040 180 | 2.00 | 40 | 4 | 8 | 22 |
| PCP 020 060 090 | PCP 020 060 130 | PCP 020 060 150 | PCP 020 060 180 | 2.00 | 60 | 4 | 8 | 22 |
| PCP 020 080 090 | PCP 020 080 130 | PCP 020 080 150 | PCP 020 080 180 | 2.00 | 80 | 4 | 8 | 22 |
| PCP 020 120 090 | PCP 020 120 130 | PCP 020 120 150 | PCP 020 120 180 | 2.00 | 120 | 4 | 8 | 22 |
| PCP 020 150 090 | PCP 020 150 130 | PCP 020 150 150 | PCP 020 150 180 | 2.00 | 150 | 4 | 8 | 22 |
| PCP 025 020 090 | PCP 025 020 130 | PCP 025 020 150 | PCP 025 020 180 | 2.50 | 20 | 4 | 8 | 16 |
| PCP 025 040 090 | PCP 025 040 130 | PCP 025 040 150 | PCP 025 040 180 | 2.50 | 40 | 4 | 8 | 16 |
| PCP 025 060 090 | PCP 025 060 130 | PCP 025 060 150 | PCP 025 060 180 | 2.50 | 60 | 4 | 8 | 16 |
| PCP 025 080 090 | PCP 025 080 130 | PCP 025 080 150 | PCP 025 080 180 | 2.50 | 80 | 4 | 8 | 16 |
| PCP 025 120 090 | PCP 025 120 130 | PCP 025 120 150 | PCP 025 120 180 | 2.50 | 120 | 4 | 8 | 16 |
| PCP 025 150 090 | PCP 025 150 130 | PCP 025 150 150 | PCP 025 150 180 | 2.50 | 150 | 4 | 8 | 16 |
| PCP 030 020 090 | PCP 030 020 130 | PCP 030 020 150 | PCP 030 020 180 | 3.00 | 20 | 4 | 8 | 16 |
| PCP 030 040 090 | PCP 030 040 130 | PCP 030 040 150 | PCP 030 040 180 | 3.00 | 40 | 4 | 8 | 16 |
| PCP 030 060 090 | PCP 030 060 130 | PCP 030 060 150 | PCP 030 060 180 | 3.00 | 60 | 4 | 8 | 16 |
| PCP 030 080 090 | PCP 030 080 130 | PCP 030 080 150 | PCP 030 080 180 | 3.00 | 80 | 4 | 8 | 16 |
| PCP 030 120 090 | PCP 030 120 130 | PCP 030 120 150 | PCP 030 120 180 | 3.00 | 120 | 4 | 8 | 16 |
| PCP 030 150 090 | PCP 030 150 130 | PCP 030 150 150 | PCP 030 150 180 | 3.00 | 150 | 4 | 8 | 16 |
| PCP 035 020 090 | PCP 035 020 130 | PCP 035 020 150 | PCP 035 020 180 | 3.50 | 20 | 4 | 8 | 16 |
| PCP 035 040 090 | PCP 035 040 130 | PCP 035 040 150 | PCP 035 040 180 | 3.50 | 40 | 4 | 8 | 16 |
| PCP 035 060 090 | PCP 035 060 130 | PCP 035 060 150 | PCP 035 060 180 | 3.50 | 60 | 4 | 8 | 16 |
| PCP 035 080 090 | PCP 035 080 130 | PCP 035 080 150 | PCP 035 080 180 | 3.50 | 80 | 4 | 8 | 16 |
| PCP 035 120 090 | PCP 035 120 130 | PCP 035 120 150 | PCP 035 120 180 | 3.50 | 120 150 | - | 8 | 16 |
| PCP 035 150 090 PCP 040 020 090 | PCP 035 150 130 PCP 040 020 130 | PCP 035 150 150 PCP 040 020 150 | PCP 035 150 180 PCP 040 020 180 | 3.50 4.00 | 20 | 4 | 8 | 16 14 |
| PCP 040 020 090 PCP 040 040 090 | PCP 040 020 130 PCP 040 040 130 | PCP 040 020 150 PCP 040 040 150 | PCP 040 020 180 PCP 040 040 180 | 4.00 | 40 | 4 | 8 | 14 |
| PCP 040 040 090 | PCP 040 040 130 | PCP 040 040 150 | PCP 040 040 180 | 4.00 | 60 | 4 | 8 | 14 |
| PCP 040 080 090 | PCP 040 080 130 | PCP 040 080 150 | PCP 040 000 180 | 4.00 | 80 | 4 | 8 | 14 |
| PCP 040 120 090 | PCP 040 080 130 | PCP 040 080 150 | PCP 040 120 180 | 4.00 | 120 | 4 | 8 | 14 |
| PCP 050 020 090 | PCP 040 120 130 PCP 050 020 130 | - | PCP 050 020 180 | 5.00 | 20 | 4 | 8 | 14 |
| PCP 050 040 090 | PCP 050 040 130 | _ | PCP 050 040 180 | 5.00 | 40 | 4 | 8 | 14 |
| PCP 050 060 090 | PCP 050 060 130 | _ | PCP 050 060 180 | 5.00 | 60 | 4 | 8 | 14 |
| PCP 050 080 090 | PCP 050 080 130 | _ | PCP 050 080 180 | 5.00 | 80 | 4 | 8 | 14 |
| PCP 050 120 090 | PCP 050 120 130 | _ | PCP 050 120 180 | 5.00 | 120 | 4 | 8 | 14 |
| PCP 060 020 090 | PCP 060 020 130 | _ | PCP 060 020 180 | 6.00 | 20 | 4 | 8 | 14 |
| PCP 060 040 090 | PCP 060 040 130 | _ | PCP 060 040 180 | 6.00 | 40 | 4 | 8 | 14 |
| PCP 060 060 090 | PCP 060 060 130 | _ | PCP 060 060 180 | 6.00 | 60 | 4 | 8 | 14 |
| PCP 060 080 090 | PCP 060 080 130 | - | PCP 060 080 180 | 6.00 | 80 | 4 | 8 | 14 |
| PCP 060 120 090 | PCP 060 120 130 | | PCP 060 120 180 | 6.00 | 120 | 4 | 8 | 14 |
| PCP 070 020 090 | PCP 070 020 130 | - | PCP 070 020 180 | 7.00 | 20 | 4 | 8 | 12 |
| PCP 070 040 090 | PCP 070 040 130 | _ | PCP 070 040 180 | 7.00 | 40 | 4 | 8 | 12 |
| PCP 070 060 090 | PCP 070 060 130 | - | PCP 070 060 180 | 7.00 | 60 | 4 | 8 | 12 |
| PCP 070 080 090 | PCP 070 080 130 | - | PCP 070 080 180 | 7.00 | 80 | 5 | 8 | 12 |
| PCP 070 120 090 | PCP 070 120 130 | - | PCP 070 120 180 | 7.00 | 120 | 5 | 8 | 12 |

Pacific[™] Xtreme

PTA Balloon Catheter OTW 0.018"

Treat longer lesions with the Pacific[™] Xtreme PTA balloon catheter OTW 0.018" that is offered in lengths from 150 to 300 mm. These balloons are well-suited for use in treating long lesions in the femoral and popliteal vessels.

TECHNICAL SPECIFICATIONS

| Catheter design | Over the wire (OTW), coaxial shaft |
|-------------------------|------------------------------------|
| Balloon material | Flexitec™Xtreme |
| Balloon coating | Hydrophilic |
| Balloon marker | 2 swaged, platinum-iridium |
| Usable shaft lengths | 90, 130 cm |
| Shaft diameter | 3.9 F-4.2 F |
| Guidewire compatibility | 0.018" |

| Reference Number Usable Length 90 cm | Reference Number Usable Length 130 cm | Balloon Diameter (mm) | Balloon Length (mm) | Recommended Introducer Sheath (F) | Nominal Pressure (atm) | RBP (atm) |
|--|---|-----------------------------|------------------------|---|------------------------------|--------------|
| PCU 040 150 090 | PCU 040 150 130 | 4.0 | 150 | 4 | 6 | 14 |
| PCU 040 200 090 | PCU 040 200 130 | 4.0 | 200 | 4 | 6 | 14 |
| PCU 040 250 090 | PCU 040 250 130 | 4.0 | 250 | 4 | 6 | 14 |
| PCU 040 300 090 | PCU 040 300 130 | 4.0 | 300 | 4 | 6 | 14 |
| PCU 050 150 090 | PCU 050 150 130 | 5.0 | 150 | 4 | 6 | 14 |
| PCU 050 200 090 | PCU 050 200 130 | 5.0 | 200 | 4 | 6 | 14 |
| PCU 050 250 090 | PCU 050 250 130 | 5.0 | 250 | 5 | 6 | 14 |
| PCU 050 300 090 | PCU 050 300 130 | 5.0 | 300 | 5 | 6 | 14 |
| PCU 060 150 090 | PCU 060 150 130 | 6.0 | 150 | 5 | 6 | 12 |
| PCU 060 200 090 | PCU 060 200 130 | 6.0 | 200 | 5 | 6 | 12 |
| PCU 060 250 090 | PCU 060 250 130 | 6.0 | 250 | 5 | 6 | 12 |
| PCU 060 300 090 | PCU 060 300 130 | 6.0 | 300 | 5 | 6 | 12 |
| PCU 070 150 090 | PCU 070 150 130 | 7.0 | 150 | 5 | 6 | 12 |
| PCU 070 200 090 | PCU 070 200 130 | 7.0 | 200 | 5 | 6 | 12 |
| PCU 070 250 090 | PCU 070 250 130 | 7.0 | 250 | 5 | 6 | 12 |

NanoCross™ Elite

0.014" OTW PTA Balloon Dilatation Catheter

Go deeper into the anatomy and across difficult lesions with NanoCross $^{\mathsf{TM}}$ Elite balloon catheter. Its seamless design from balloon to tip offers efficient energy transfer.

| Reference Number Usable Length 90 cm | Reference Number Usable Length 150 cm | Balloon Diameter (mm) | Balloon Length (mm) | Recomm. Introducer Sheath (F) | Nominal Pressure (atm) | RBP (atm) |
|--|---|------------------------------------|---------------------------|-------------------------------------|------------------------------|--------------|
| | | | | | | 1.4 |
| AB14W015020090 AB14W015040090 | AB14W015020150 | 1.5 1.5 | 20 40 | 4 | 8 | 14 14 |
| AB14W015040090 AB14W020020090 | AB14W015040150 | | 20 | 4 | 8 | 14 |
| | AB14W020020150 | 2.0 | | | _ | |
| AB14W020040090 | AB14W020040150 | 2.0 | 40 | 4 | 8 | 14 14 |
| AB14W020060090 | AB14W020060150 | 2.0 | 60 80 | | 8 | |
| AB14W020080090 AB14W020100090 | AB14W020080150 AB14W020100150 | 2.0 2.0 | 100 | 4 | 8 | 14 14 |
| AB14W020100090 AB14W020120090 | AB14W020100150 AB14W020120150 | | 120 | 4 | _ | 14 |
| AB14W020120090 AB14W020150090 | | 2.0 2.0 | 150 | 4 | 8 | 14 |
| | AB14W020150150 | 2.0(proximal) / 1.5(distal) | 210 | 4 | 8 | 14 |
| AB14W020210090 AB14W025020090 | AB14W020210150 AB14W025020150 | 2.0(proximal) / 1.5(distal) | 210 | 4 | 8 | 14 |
| AB14W025020090 AB14W025040090 | AB14W025020150 AB14W025040150 | | 40 | | _ | 14 |
| | | 2.5 | 60 | 4 | 8 | 14 14 |
| AB14W025060090 | AB14W025060150 | 2.5 2.5 | 80 | 4 | 8 | 14 |
| AB14W025080090 AB14W025100090 | AB14W025080150 AB14W025100150 | 2.5 | 100 | 4 | 8 | 14 |
| AB14W025100090 AB14W025120090 | AB14W025100150 AB14W025120150 | 2.5 | 120 | 4 | 8 | 14 |
| AB14W025150090 | AB14W025120150 AB14W025150150 | 2.5 | 150 | 4 | 8 | 14 |
| AB14W025150090 AB14W025210090 | AB14W025130130 AB14W025210150 | 2.5(proximal) / 2.0(distal) | 210 | 4 | 8 | 14 |
| AB14W025210090 AB14W030020090 | AB14W025210150 AB14W030020150 | 2.5(proximal) / 2.0(distal) 3.0 | 210 | 4 | 8 | 14 |
| | | 3.0 | 40 | 4 | 8 | 14 |
| AB14W030040090 AB14W030060090 | AB14W030040150 AB14W030060150 | 3.0 | 60 | 4 | 8 | 14 |
| AB14W030080090 AB14W030080090 | AB14W030080150 AB14W030080150 | | 80 | 4 | _ | 14 |
| | | 3.0 | | 4 | 8 | 14 |
| AB14W030100090 AB14W030120090 | AB14W030100150 | 3.0 3.0 | 100 120 | 4 | 8 | 14 |
| AB14W030150090 | AB14W030120150 AB14W030150150 | 3.0 | 150 | 4 | 8 | 14 |
| | | | 210 | 4 | _ | 14 |
| AB14W030210090 AB14W035020090 | AB14W030210150 AB14W035020150 | 3.0(proximal) / 2.5(distal) 3.5 | 210 | 4 | 8 | 14 |
| | | 3.5 | 40 | 4 | 8 | 14 |
| AB14W035040090 AB14W035060090 | AB14W035040150 AB14W035060150 | 3.5 | 60 | 4 | 8 | 14 |
| AB14W035080090 AB14W035080090 | AB14W035080150 | 3.5 | 80 | 4 | 8 | 14 |
| AB14W035100090 | AB14W035100150 | 3.5 | 100 | 4 | 8 | 14 |
| AB14W035100090 AB14W035120090 | AB14W035100150 AB14W035120150 | 3.5 | 120 | 4 | 8 | 14 |
| AB14W035150090 | AB14W035150150 | 3.5 | 150 | 4 | 8 | 14 |
| AB14W035130090 AB14W035210090 | AB14W035130130 AB14W035210150 | 3.5(proximal) / 3.0(distal) | 210 | 4 | 8 | 14 |
| AB14W040020090 | AB14W035210150 AB14W040020150 | 4.0 | 20 | 4 | 8 | 14 |
| AB14W040020090 AB14W040040090 | AB14W040020150 AB14W040040150 | 4.0 | 40 | 4 | 8 | 14 |
| AB14W040040090 AB14W040060090 | AB14W040040150 | 4.0 | 60 | 4 | 8 | 14 |
| AB14W040000090 AB14W040080090 | AB14W040080150 | 4.0 | 80 | 4 | 8 | 14 |
| AB14W040080090 AB14W040100090 | AB14W040100150 | 4.0 | 100 | 4 | 8 | 14 |
| AB14W040100090 AB14W040120090 | AB14W040100150 AB14W040120150 | 4.0 | 120 | 4 | 8 | 14 |
| AB14W040120090 AB14W040150090 | AB14W040150150 | 4.0 | 150 | 4 | 8 | 14 |
| AB14W040130090 AB14W040210090 | AB14W040130150 | 4.0(proximal) / 3.5(distal) | 210 | 4 | 8 | 14 |
| AB14W050020090 | AB14W050020150 | 4.0(proximal) / 3.5(distal) 5.0 | 210 | 5 | 8 | 14 |
| AB14W050020090 AB14W050040090 | AB14W050020150 AB14W050040150 | 5.0 | 40 | 5 | 8 | 14 |
| AB14W050060090 | AB14W050060150 | 5.0 | 60 | 5 | 8 | 14 |
| AB14W050080090 | AB14W050080150 AB14W050080150 | 5.0 | 80 | 5 | 8 | 14 |
| AB14W050100090 | AB14W050100150 | 5.0 | 100 | 5 | 8 | 14 |
| AB14W050100090 AB14W050120090 | AB14W050100150 AB14W050120150 | 5.0 | 120 | 5 | 8 | 14 |
| AB14W050150090 | AB14W050150150 | 5.0 | 150 | 5 | 8 | 14 |
| AB14W050200090 | AB14W050200150 | 5.0 | 200 | 5 | 8 | 14 |
| AB14W060020090 | AB14W050200150 | 6.0 | 20 | 5 | 8 | 14 |
| AB14W060020090 AB14W060040090 | AB14W060020150 AB14W060040150 | 6.0 | 40 | 5 | 8 | 14 |
| AB14W060040090 | AB14W060040150 | 6.0 | 60 | 5 | 8 | 14 |
| AB14W060080090 | AB14W060080150 AB14W060080150 | 6.0 | 80 | 5 | 8 | 14 |
| AB14W060100090 | AB14W060100150 | 6.0 | 100 | 5 | 8 | 14 |
| AB14W060100090 AB14W060120090 | AB14W060100150 AB14W060120150 | 6.0 | 120 | 5 | 8 | 14 |
| AB14W060120090 AB14W060150090 | AB14W060120150 AB14W060150150 | 6.0 | 150 | 5 | 8 | 14 |
| AB14W060130090 AB14W060200090 | AB14W060200150 | 6.0 | 200 | 6 | 8 | 14 |
| UDI-11000500030 | VP1-444000500130 | 0.0 | 200 | U | O | 144 |

$RapidCross^{\mathsf{m}}$

PTA Rapid Exchange Balloon Dilatation Catheter

Reach for the RapidCross $^{\text{\tiny M}}$ PTA rapid exchange balloon dilatation catheter when you need to reach more distal lesions in the small vessels below the knee. This catheter is the Medtronic solution for a rapid exchange balloon with 0.014" guidewire capability.

| Reference Number Usable Length 90 cm | Reference Number Usable Length 170 cm | Balloon Diameter (mm) | Balloon Length (mm) | Recomm. Introducer Sheath (F) | Nominal Pressure (atm) | RBP (atm) |
|--|---|-----------------------------|---------------------------|-------------------------------------|------------------------------|--------------|
| A14BX020020090 | A14BX020020170 | 2.0 | 20 | 4 | 8 | 14 |
| A14BX020040090 | A14BX020040170 | 2.0 | 40 | 4 | 8 | 14 |
| A14BX020060090 | A14BX020060170 | 2.0 | 60 | 4 | 8 | 14 |
| A14BX020080090 | A14BX020080170 | 2.0 | 80 | 4 | 8 | 14 |
| A14BX020100090 | A14BX020100170 | 2.0 | 100 | 4 | 8 | 14 |
| A14BX020120090 | A14BX020120170 | 2.0 | 120 | 4 | 8 | 14 |
| A14BX020150090 | A14BX020150170 | 2.0 | 150 | 4 | 8 | 14 |
| A14BX020210090 | A14BX020210170 | 2.0(proximal) / 1.5(distal) | 210 | 4 | 8 | 14 |
| A14BX025020090 | A14BX025020170 | 2.5 | 20 | 4 | 8 | 14 |
| A14BX025040090 | A14BX025040170 | 2.5 | 40 | 4 | 8 | 14 |
| A14BX025060090 | A14BX025060170 | 2.5 | 60 | 4 | 8 | 14 |
| A14BX025080090 | A14BX025080170 | 2.5 | 80 | 4 | 8 | 14 |
| A14BX025100090 | A14BX025100170 | 2.5 | 100 | 4 | 8 | 14 |
| A14BX025120090 | A14BX025120170 | 2.5 | 120 | 4 | 8 | 14 |
| A14BX025150090 | A14BX025150170 | 2.5 | 150 | 4 | 8 | 14 |
| A14BX025210090 | A14BX025210170 | 2.5(proximal) / 2.0(distal) | 210 | 4 | 8 | 14 |
| A14BX030020090 | A14BX030020170 | 3.0 | 20 | 4 | 8 | 14 |
| A14BX030040090 | A14BX030040170 | 3.0 | 40 | 4 | 8 | 14 |
| A14BX030060090 | A14BX030060170 | 3.0 | 60 | 4 | 8 | 14 |
| A14BX030080090 | A14BX030080170 | 3.0 | 80 | 4 | 8 | 14 |
| A14BX030100090 | A14BX030100170 | 3.0 | 100 | 4 | 8 | 14 |
| A14BX030120090 | A14BX030120170 | 3.0 | 120 | 4 | 8 | 14 |
| A14BX030150090 | A14BX030150170 | 3.0 | 150 | 4 | 8 | 14 |
| A14BX030210090 | A14BX030210170 | 3.0(proximal) / 2.5(distal) | 210 | 4 | 8 | 14 |
| A14BX035020090 | A14BX035020170 | 3.5 | 20 | 4 | 8 | 14 |
| A14BX035040090 | A14BX035040170 | 3.5 | 40 | 4 | 8 | 14 |
| A14BX035060090 | A14BX035060170 | 3.5 | 60 | 4 | 8 | 14 |
| A14BX035080090 | A14BX035080170 | 3.5 | 80 | 4 | 8 | 14 |
| A14BX035100090 | A14BX035100170 | 3.5 | 100 | 4 | 8 | 14 |
| A14BX035120090 | A14BX035120170 | 3.5 | 120 | 4 | 8 | 14 |
| A14BX035150090 | A14BX035150170 | 3.5 | 150 | 4 | 8 | 14 |
| A14BX035210090 | A14BX035210170 | 3.5(proximal) / 3.0(distal | 210 | 4 | 8 | 14 |
| A14BX040020090 | A14BX040020170 | 4.0 | 20 | 4 | 8 | 14 |
| A14BX040040090 | A14BX040040170 | 4.0 | 40 | 4 | 8 | 14 |
| A14BX040060090 | A14BX040060170 | 4.0 | 60 | 4 | 8 | 14 |
| A14BX040080090 | A14BX040080170 | 4.0 | 80 | 4 | 8 | 14 |
| A14BX040100090 | A14BX040100170 | 4.0 | 100 | 4 | 8 | 14 |
| A14BX040120090 | A14BX040120170 | 4.0 | 120 | 4 | 8 | 14 |
| A14BX040150090 | A14BX040150170 | 4.0 | 150 | 4 | 8 | 14 |
| A14BX040210090 | A14BX040210170 | 4.0(proximal) / 3.5(distal) | 210 | 4 | 8 | 14 |

Chocolate™*

PTA Balloon Catheter

Minimize vessel trauma, dissections, and the need for bailout stenting above or below the knee with the Chocolate $^{\text{\tiny M*}}$ PTA balloon. The balloon's unique nitinol constraining structure creates pillows and grooves that provide a predictable, uniform, and atraumatic dilatation.

| Reference Number | Balloon Diameter (mm) | Balloon Length (mm) | Catheter Length (cm) | Guidewire (in) | Introducer Sheath (F) | Nominal Pressure (atm) | RBP (atm) |
|------------------|-----------------------------|---------------------------|----------------------------|-------------------|-----------------------------|---------------------------|--------------|
| CB1415025040OTW | 2.5 | 40 | 150 | 0.014" | 5 | 9 | 14 |
| CB1415025080OTW | 2.5 | 80 | 150 | 0.014" | 5 | 9 | 14 |
| CB1415025120OTW | 2.5 | 120 | 150 | 0.014" | 5 | 9 | 14 |
| CB1415030040OTW | 3.0 | 40 | 150 | 0.014" | 5 | 9 | 14 |
| CB1415030080OTW | 3.0 | 80 | 150 | 0.014" | 5 | 9 | 14 |
| CB1415030120OTW | 3.0 | 120 | 150 | 0.014" | 5 | 9 | 14 |
| CB1413535040OTW | 3.5 | 40 | 135 | 0.014" | 5 | 9 | 14 |
| CB1413535080OTW | 3.5 | 80 | 135 | 0.014" | 5 | 9 | 14 |
| CB1413535120OTW | 3.5 | 120 | 135 | 0.014" | 5 | 9 | 14 |
| CB1413540040OTW | 4.0 | 40 | 135 | 0.014" | 5 | 9 | 14 |
| CB1413540080OTW | 4.0 | 80 | 135 | 0.014" | 5 | 9 | 14 |
| CB1413540120OTW | 4.0 | 120 | 135 | 0.014" | 5 | 9 | 14 |
| CB1812050040OTW | 5.0 | 40 | 120 | 0.018" | 6 | 6 | 12 |
| CB1812050080OTW | 5.0 | 80 | 120 | 0.018" | 6 | 6 | 12 |
| CB1812050120OTW | 5.0 | 120 | 120 | 0.018" | 6 | 6 | 12 |
| CB1812060040OTW | 6.0 | 40 | 120 | 0.018" | 6 | 6 | 12 |
| CB1812060080OTW | 6.0 | 80 | 120 | 0.018" | 6 | 6 | 12 |
| CB1812060120OTW | 6.0 | 120 | 120 | 0.018" | 6 | 6 | 12 |

TM*Third party brands are trademarks of their respective owners.





Cragg-McNamara™

Valved Infusion Catheter

Cragg-McNamara[™] catheter is a 4 or 5 F single-lumen catheter with a proprietary valved tip, which gives the option to to infuse without a guidewire in place. Cragg-McNamara can be used coaxially with the ProStream[™] wire to maximize treatment area and treat two areas simultaneously below the knee.

| Reference Number | Diameter (mm) | Usable Length (cm) | Infusion Length (cm) | Max. Guidewire (in) |
|---------------------|------------------|-----------------------|-------------------------|------------------------|
| 41032-01 | 4 | 40 | 10 | 0.035 |
| 41033-01 | 4 | 40 | 20 | 0.035 |
| 41034-01 | 4 | 65 | 5 | 0.035 |
| 41035-01 | 4 | 65 | 10 | 0.035 |
| 41036-01 | 4 | 65 | 20 | 0.035 |
| 41037-01 | 4 | 100 | 5 | 0.035 |
| 41038-01 | 4 | 100 | 10 | 0.035 |
| 41039-01 | 4 | 100 | 20 | 0.035 |
| 41040-01 | 4 | 135 | 5 | 0.035 |
| 41041-01 | 4 | 135 | 10 | 0.035 |
| 41042-01 | 4 | 135 | 20 | 0.035 |
| 41043-01 | 5 | 40 | 5 | 0.038 |
| 41044-01 | 5 | 40 | 10 | 0.038 |
| 41045-01 | 5 | 40 | 20 | 0.038 |
| 41046-01 | 5 | 65 | 5 | 0.038 |
| 41047-01 | 5 | 65 | 10 | 0.038 |
| 41048-01 | 5 | 65 | 20 | 0.038 |
| 41049-01 | 5 | 100 | 5 | 0.038 |
| 41050-01 | 5 | 100 | 10 | 0.038 |
| 41051-01 | 5 | 100 | 20 | 0.038 |
| 41052-01 | 5 | 100 | 30 | 0.038 |
| 41053-01 | 5 | 100 | 40 | 0.038 |
| 41054-01 | 5 | 100 | 50 | 0.038 |
| 41055-01 | 5 | 135 | 5 | 0.038 |
| 41056-01 | 5 | 135 | 10 | 0.038 |
| 41057-01 | 5 | 135 | 20 | 0.038 |
| 41058-01 | 5 | 135 | 30 | 0.038 |
| 41059-01 | 5 | 135 | 40 | 0.038 |
| 41060-01 | 5 | 135 | 50 | 0.038 |

ProStream[™]

Infusion Wire

The ProStream $^{\text{m}}$ wire is a 0.035" diameter, single-lumen, closed-end wire that can be used alone or coaxially to treat two areas simultaneously, anywhere below the knee.

| Reference Number | Diameter (in) | Usable Length (cm) | Infusion Length (cm) |
|---------------------|------------------|-----------------------|-------------------------|
| 41272-01 | 0.035 | 145 | 6 |
| 41273-01 | 0.035 | 145 | 9 |
| 41274-01 | 0.035 | 145 | 12 |
| 41276-01 | 0.035 | 175 | 6 |
| 41277-01 | 0.035 | 175 | 9 |
| 41278-01 | 0.035 | 175 | 12 |


MicroMewi™

Infusion Catheter

The MicroMewi $^{\text{\tiny{M}}}$ catheter is a single-lumen, 2.9 F flexible catheter that is introduced over an 0.018" guidewire for delivery of pharmaceutical agents directly into a thrombosed segment.

| Reference Number | Diameter (F) | Usable Length (cm) | Infusion Length (cm) | Max. Guidewire (in) |
|---------------------|-----------------|-----------------------|-------------------------|------------------------|
| 41063-01 | 2.9 | 150 | 5 | 0.018 |
| 41064-01 | 2.9 | 150 | 10 | 0.018 |
| 41066-01 | 2.9 | 180 | 5 | 0.018 |
| 41067-01 | 2.9 | 180 | 10 | 0.018 |

SNARES

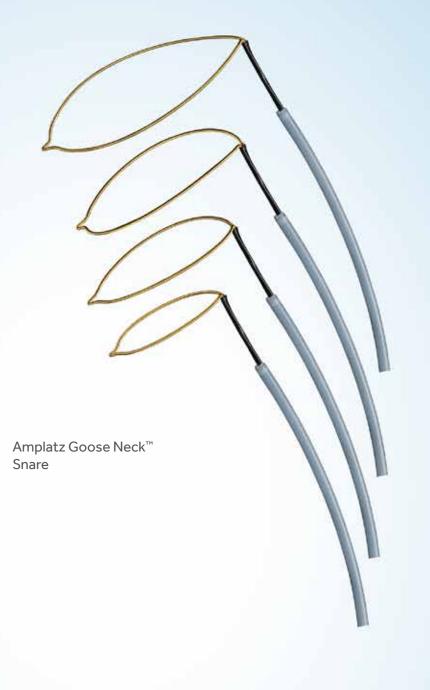

Amplatz Goose Neck™

Snare Kit

The Amplatz Goose Neck™ snare kit is intended for use in the retrieval of atraumatic foreign bodies. Each kit contains one snare, one catheter, one introducer, and one torque device. The snare is constructed of nitinol cable and a gold-plated tungsten loop. Because of the snare's preformed loop and superelastic construction, it can be introduced through catheters without risk of snare deformation. The snare catheter has a platinum-iridium radiopaque marker band. The Amplatz Goose Neck snare kit is intended for the cardiovascular and peripheral vascular systems.

| Reference Number | Loop Diameter (mm) | Snare Length (cm) | Catheter Size (F) | Catheter Length (cm) |
|---------------------|-----------------------|----------------------|----------------------|-------------------------|
| GN500 | 5 | 120 | 4 | 102 |
| GN1000 | 10 | 120 | 4 | 102 |
| GN1001 | 10 | 65 | 4 | 48 |
| GN1500 | 15 | 120 | 6 | 102 |
| GN2000 | 20 | 120 | 6 | 102 |
| GN2500 | 25 | 120 | 6 | 102 |
| GN2501 | 25 | 65 | 6 | 48 |
| GN3000 | 30 | 120 | 6 | 102 |
| GN3500 | 35 | 120 | 6 | 102 |

Amplatz Goose Neck™

Microsnare Kit

The Amplatz Goose Neck[™] microsnare kit is intended for the coronary and peripheral vascular systems and the extracranial neurovascular anatomy. Each kit contains one microsnare, one microsnare catheter, one introducer, and one torque device.

| Reference Number | Loop Diameter (mm) | Snare Length (cm) | Catheter Size (F) | Catheter Length (cm) |
|---------------------|-----------------------|----------------------|----------------------|-------------------------|
| SK200 | 2 | 175 | 2.3-3 | 150 |
| SK201 | 2 | 200 | 2.3-3 | 175 |
| SK400 | 4 | 175 | 2.3-3 | 150 |
| SK401 | 4 | 200 | 2.3-3 | 175 |
| SK700 | 7 | 175 | 2.3-3 | 150 |
| SK701 | 7 | 200 | 2.3-3 | 175 |

Snare Replacement Catheters

Each Amplatz Goose Neck[™] snare replacement catheter kit contains one snare catheter. The snare replacement catheters have a platinum-iridium radiopaque marker band. The Amplatz Goose Neck snare replacement catheter is intended for the cardiovascular and peripheral vascular systems.

| Reference Number | Catheter Outside Diameter (F) | Catheter Length (cm) |
|---------------------|----------------------------------|-------------------------|
| MC4000 | 4 | 102 |
| MC4001 | 4 | 48 |
| MC6000 | 6 | 102 |
| MC6001 | 6 | 48 |

GUIDEWIRES Wholey™* Guidewire System $\mathsf{Nitrex}^{^\mathsf{TM}}$ Guidewire

Wholey™*

Guidewire System

The Wholey $^{\text{m*}}$ guidewire is intended to facilitate the placement and exchange of interventional devices during diagnostic or therapeutic interventional procedures. Wholey guidewires provide enhanced torqueability and lubricity, alllowing interventionalists to approach challenging cases with confidence.

| Reference Number | Description | Stiffness Profile | Tip Style | Size Outer Dia. (in) | Size Length (cm) | Quantity |
|---------------------|--------------------------------------|----------------------|----------------------|----------------------------|------------------------|----------|
| WWFS35145 | Floppy Tip, Extension Compatible | Floppy | Straight/Shapeable | 0.035 | 145 | 3/Pkg |
| WWFS35175 | Floppy Tip, Extension Compatible | Floppy | Straight/Shapeable | 0.035 | 175 | 3/Pkg |
| WWFS35260 | Floppy Tip, Exchange Length | Floppy | Straight/Shapeable | 0.035 | 260 | 3/Pkg |
| WWFS35300 | Floppy Tip, Exchange Length | Floppy | Straight/Shapeable | 0.035 | 300 | 3/Pkg |
| WWIJ35145 | Modified J Tip, Extension Compatible | Intermediate | Modified J/Shapeable | 0.035 | 145 | 3/Pkg |
| WWIJ35175 | Modified J Tip, Extension Compatible | Intermediate | Modified J/Shapeable | 0.035 | 175 | 3/Pkg |
| WWIJ35260 | Modified J Tip, Exchange Length | Intermediate | Modified J/Shapeable | 0.035 | 260 | 3/Pkg |
| WWIJ35300 | Modified J Tip, Exchange Length | Intermediate | Modified J/Shapeable | 0.035 | 300 | 3/Pkg |
| WWSS35145 | Standard Tip, Extension Compatible | Standard | Straight/Shapeable | 0.035 | 145 | 3/Pkg |
| WWSS35175 | Standard Tip, Extension Compatible | Standard | Straight/Shapeable | 0.035 | 175 | 3/Pkg |
| WWSS35260 | Standard Tip, Exchange Length | Standard | Straight/Shapeable | 0.035 | 260 | 3/Pkg |
| WWSS35300 | Standard Tip, Exchange Length | Standard | Straight/Shapeable | 0.035 | 300 | 3/Pkg |
| WWES35001 | Extension System | Standard | Straight/Shapeable | 0.035 | 155 | 3/Pkg |
| WWTD35001 | Kendall Torque Device | NA | NA | 0.025" | -0.038" | 10/Pkg |

Babywire™

Nitinol Guidewire

The Babywire[™] guidewire assists in the placement of initial catheters and exchange of small vessel anatomy. Babywire guidewires are straight 0.012" nitinol guidewires designed with double-ended round tips and flexible ends. Babywire guidewires are kink-resistant and provide 1:1 torque.

| Reference Number (10/Package) | Diameter (in) | Length (cm) |
|----------------------------------|------------------|----------------|
| BW1200 | 0.012 | 18 |
| BW1201 | 0.012 | 50 |

Nitrex™

Guidewire

Nitrex $^{\text{\tiny{M}}}$ guidewires are kink-resistant and provide 1:1 torque. They are constructed of a superelastic nitinol core wire with a gold-plated tungsten coil for enhanced visualization. The wires have proprietary silicone coating for ease in placement. A torque device is packaged with 0.014" and 0.018" Nitrex guidewires. The 0.014" and 0.018" Nitrex guidewires are intended for use in the peripheral and coronary vasculatures. The 0.025" and 0.035" Nitrex guidewires are indicated for use in the peripheral vasculature.

| Reference Number (3/Package)† | Diameter (in) | Length (cm) | Tip Style | Tip Length (cm) | Tip Shape | Tip Angle (°) |
|-------------------------------------|---------------|-------------|-----------|--------------------|-----------|---------------|
| 0.014" | | | | | | |
| N140801 | 0.014 | 80 | INT | 5 | А | 15 |
| N141802 | 0.014 | 180 | INT | 5 | Α | 15 |
| N143001 | 0.014 | 300 | INT | 5 | А | 15 |
| 0.018" | | | | | | |
| N180601 | 0.018 | 60 | INT | 5 | S | 0 |
| N180603 | 0.018 | 60 | INT | 7 | S | 0 |
| N180801 | 0.018 | 80 | STD | 2 | S | 0 |
| N180802 | 0.018 | 80 | INT | 5 | Α | 15 |
| N181804 | 0.018 | 180 | STD | 2 | S | 0 |
| N181805 | 0.018 | 180 | INT | 5 | Α | 15 |
| N181806 | 0.018 | 180 | Flop | 20 | Α | 15 |
| N183001 | 0.018 | 300 | STD | 2 | S | 0 |
| N183002 | 0.018 | 300 | INT | 5 | Α | 15 |
| 0.025" | | | | | | |
| N251801 | 0.025 | 180 | INT | 8 | Α | 15 |
| N251802 | 0.025 | 180 | STD | 2 | S | 0 |
| N252601 | 0.025 | 260 | INT | 8 | Α | 15 |
| 0.035" Flexible S | Shaft | | | | | |
| N351451 | 0.035 | 145 | INT | 15 | S | 0 |
| N351452 | 0.035 | 145 | INT | 15 | Α | 45 |
| N351803 | 0.035 | 180 | INT | 15 | S | 0 |
| N352601 | 0.035 | 260 | INT | 15 | Α | 45 |
| N354001 | 0.035 | 400 | INT | 15 | S | 0 |
| 0.035" Stiff Sha | ft | | | | | |
| N350801 | 0.035 | 80 | INT | 9 | S | 0 |
| N351453 | 0.035 | 145 | FLOP | 14 | Α | 45 |
| N351454 | 0.035 | 145 | INT | 9 | S | 0 |
| N351455 | 0.035 | 145 | FLOP | 14 | S | 0 |
| N351804 | 0.035 | 180 | INT | 9 | S | 0 |
| N351805 | 0.035 | 180 | STD | 4 | Α | 45 |
| N352602 | 0.035 | 260 | FLOP | 14 | S | 0 |
| N352603 | 0.035 | 260 | STD | 4 | Α | 45 |
| N352604 | 0.035 | 260 | INT | 9 | S | 0 |
| N353001 | 0.035 | 300 | INT | 9 | S | 0 |
| N354002 | 0.035 | 400 | INT | 9 | S | 0 |

 $^{^{\}dagger}\text{Torque}$ devices included on 0.014" and 0.018" wire sizes.

SUPPORT CATHETERS, Y-CONNECTORS, AND GUIDE CATHETERS

TrailBlazer™ Angled Support Catheter

TrailBlazer™

Support Catheter

The TrailBlazer $^{\text{TM}}$ catheter is an over-the-wire, single-lumen, seamless catheter with three embedded radiopaque markers, an atraumatic tapered tip, and a 40 cm hydrophilic distal tip coating. The TrailBlazer catheter is designed for high visibility, optimal wire support, and ease of lesion entry for difficult-to-cross lesions.

| Reference Number (5/Package) | Guidewire Compatibility | Working Length (cm) | Minimum Guide Sheath (F) | Minimum Introducer Sheath (F) | Marker Band Spacing (mm) |
|------------------------------------|----------------------------|------------------------|-----------------------------|----------------------------------|-----------------------------|
| SC-014-135 | 0.014 | 135 | 5 | 4 | 15 |
| SC-014-150 | 0.014 | 150 | 5 | 4 | 15 |
| SC-018-090 | 0.018 | 90 | 5 | 4 | 15 |
| SC-018-135 | 0.018 | 135 | 5 | 4 | 15 |
| SC-018-150 | 0.018 | 150 | 5 | 4 | 15 |
| SC-035-065 | 0.035 | 65 | 6 | 5 | 50 |
| SC-035-090 | 0.035 | 90 | 6 | 5 | 50 |
| SC-035-135 | 0.035 | 135 | 6 | 5 | 50 |
| SC-035-150 | 0.035 | 150 | 6 | 5 | 50 |

TrailBlazer™

Angled Support Catheter

With an angled tip and braided shaft design, the TrailBlazer $^{\text{\tiny M}}$ angled support catheter has exceptional pushability and directionality to reach and cross lesions.

| Reference Number (5/Package) | Guidewire Compatibility | Working Length (cm) | Minimum Guide Sheath (F) | Minimum Introducer Sheath (F) | Marker Band Spacing (mm) |
|------------------------------------|----------------------------|------------------------|-----------------------------|----------------------------------|-----------------------------|
| ASC-014-090 | 0.014 | 90 | 5 | 4 | 15 |
| ASC-014-135 | 0.014 | 135 | 5 | 4 | 15 |
| ASC-014-150 | 0.014 | 150 | 5 | 4 | 15 |
| ASC-018-090 | 0.018 | 90 | 5 | 4 | 15 |
| ASC-018-135 | 0.018 | 135 | 5 | 4 | 15 |
| ASC-018-150 | 0.018 | 150 | 5 | 4 | 15 |
| ASC-035-065 | 0.035 | 65 | 5 | 4 | 50 |
| ASC-035-090 | 0.035 | 90 | 5 | 4 | 50 |
| ASC-035-135 | 0.035 | 135 | 5 | 4 | 50 |
| ASC-035-150 | 0.035 | 150 | 5 | 4 | 50 |

BigEasy™

Rotating Y-connector

The BigEasy™ rotating Y-connector is designed for guiding, positioning, and locking guidewires or catheters into place.

| Reference Number (5/Package) | Description |
|---------------------------------|------------------------|
| MVA100 | 2-way Adjustable Valve |

Sequel™

Rotating Double Y-connector

The Sequel[™] Y-connector is designed for guiding, positioning, and locking guidewires or catheters into place.

| Reference Number (5/Package) | Description |
|---------------------------------|------------------------|
| MVA200 | 3-way Adjustable Valve |

Launcher™

Peripheral Guide Catheter

The Launcher[™] peripheral guide catheter is designed for multiple interventional approaches.

| Reference Number | French Size (F) | Length (cm) | Curve Style | | | |
|---------------------|-----------------|-------------|-------------|--|--|--|
| Renal Curve | | | | | | |
| LA6PK1W | 6 | 47 | PK1 | | | |
| LA7PK1W | 7 | 47 | PK1 | | | |
| LA8PK1W | 8 | 47 | PK1 | | | |
| Hockey Stick | | | | | | |
| LA6MPHK | 6 | 55 | MPH | | | |
| LA7MPHK | 7 | 55 | MPH | | | |
| LA8MPHK | 8 | 55 | MPH | | | |
| Renal Double C | urve | | | | | |
| LA6RDCK | 6 | 55 | RDC | | | |
| LA7RDCK | 7 | 55 | RDC | | | |
| LA8RDCK | 8 | 55 | RDC | | | |
| Sheperd's Croc | Sheperd's Crook | | | | | |
| LA6SCR40K | 6 | 55 | SCR | | | |
| LA7SCR40K | 7 | 55 | SCR | | | |
| LA8SCR40K | 8 | 55 | SCR | | | |

| Reference Number | French Size (F) | Length (cm) | Curve Style |
|---------------------|--------------------|-------------|-------------|
| Multipurpose | | | |
| LA6MP1K | 6 | 55 | MP1 |
| LA7MP1K | 7 | 55 | MP1 |
| LA8MP1K | 8 | 55 | MP1 |
| Champ | | | |
| LA6CHAMP15K | 6 | 55 | Champ 1.5 |
| LA7CHAMP15K | 7 | 55 | Champ 1.5 |
| LA8CHAMP15K | 8 | 55 | Champ 1.5 |
| LA6CHAMP20K | 6 | 55 | Champ 2.0 |
| LA7CHAMP20K | 7 | 55 | Champ 2.0 |
| LA8CHAMP20K | 8 | 55 | Champ 2.0 |
| LA6CHAMP25K | 6 | 55 | Champ 2.5 |
| LA7CHAMP25K | 7 | 55 | Champ 2.5 |
| LA8CHAMP25K | 8 | 55 | Champ 2.5 |

Admiral™ Xtreme™ 0.035" PTA Balloon Catheter

Indications for Use: The Admiral Xtreme PTA Balloon Dilatation Catheter is intended to dilate stenoses in the iliac, femoral, iliofemoral, popliteal, infra-popliteal, and renal arteries, and for the treatment of obstructive lesions of native or synthetic arteriovenous dialysis fistulae. Test data is on file at Medtronic Inc.

Bench test results may not be indicative of clinical performance.

Chocolate[™] PTA Balloon

Indications for Use: The Chocolate™ PTA Balloon Catheter is intended for balloon dilatation of lesions in the peripheral vasculature, including the iliac, femoral, iliofemoral, popliteal, infra-popliteal, and renal arteries.

Indications for Use: The Babywire™ Guidewire is intended for assisting in the placement of initial catheters and/or exchange in the small vessel anatomy. The Babywire Guidewire is compatible with a 24 gauge needle or 2.0 French catheter. The Babywire Guidewire is not indicated for coronary use.

BigEasy™ Rotating Y-connectors

Indications for Use: The BigEasy™ Rotating Y-connectors is designed for use during Percutaneous Transluminal Coronary Angioplasty (PTCA) and other intravascular therapeutic procedures that utilize a guiding catheter. The Y-connector provides a means for inserting guidewires or catheters into the vasculature, and positioning and locking them into place. Turning the thumb wheel prevents blood loss and catheter movement.

Cragg-McNamara™ Valved Infusion Catheters

Indications for Use: The Cragg-McNamara™ Valved Infusion Catheter is intended to be used for the controlled selective infusion of physician-specified pharmacologic agents or radiopaque contrast media into the general vasculature. All pharmacologic agents utilized with the Micro Therapeutics Infusion Catheter should be fully prepared and used according to the instructions for use of the specific pharmacologic agent. The Micro Therapeutics Infusion Catheter is not intended for coronary, pediatric, or neonatal use.

Enteer™ Re-entry Catheter

Indications for Use: The Enteer™ Re-entry Catheter is indicated for directing, steering, controlling, and supporting a guidewire in order to access discrete regions of the peripheral vasculature. When used as part of the Peripheral System, the Enteer Catheter is indicated for use to facilitate the intraluminal placement of conventional guidewires beyond stenotic peripheral lesions (including chronic total occlusions) prior to placement of other interventional

Enteer™ Re-entry Guidewire

Indications for Use: The Enteer™ Re-entry Guidewire is intended to facilitate placement of balloon dilatation catheters or other intravascular devices during percutaneous transluminal angioplasty (PTA). The Enteer Guidewire is not to be used in cerebral blood vessels. When used as part of the Peripheral System, the Enteer Guidewire is indicated for use to facilitate the intraluminal placement of conventional guidewires beyond stenotic peripheral lesions (including chronic total occlusions) prior to placement of other interventional devices.

EverCross™ 0.035" PTA Balloon Catheter

Indications for Use: The EverCross¹⁰ 0.035 OTW PTA Dilatation Catheter is intended to dilate stenoses in the iliac, femoral, iliofemoral, popliteal, infrapopliteal, and renal arteries, and for the treatment of obstructive lesions of native or synthetic arteriovenous dialysis fistulae. This device is also indicated for stent post-dilatation in the peripheral vasculature.

EverFlex™ Self-expanding Peripheral Stent SystemIndication: The EverFlex™ Self-Expanding Peripheral Stent System is intended to improve luminal diameter in the treatment of symptomatic de novo or restenotic lesions up to 180 mm in length in the native superficial femoral artery and/or proximal popliteal arteries with reference vessel diameters ranging from 4.5 mm-7.5 mm. The EverFlex Self-Expanding Peripheral Stent System is indicated for improving luminal diameter in patients with atherosclerotic disease of the common and/or external iliac arteries up to and including 100 mm in length, with a reference vessel diameter of 4.5 mm-7.5 mm. The Protégé EverFlex Self-expanding Biliary Stent System is intended as a palliative treatment of malignant neoplasms in the biliary tree.

Contraindications: Use of the EverFlex™ Self-Expanding Peripheral Stent System is contraindicated in patients with known hypersensitivity to nickel titanium and in patients contraindicated for anticoagulant and/or antiplatelet therapy patients who are judged to have a lesion that prevents complete inflation of an angioplasty balloon or proper placement of the stent or stent delivery system. Potential Adverse Events: Potential adverse events which may be associated with the use of a stent in the SFA and proximal popliteal arteries include, but are not limited to: Allergic reaction, Amputation, Artery perforation or rupture, Bleeding requiring transfusion, Infection, Pseudoaneurysm, Restenosis, Stent collapse or fracture, Stent migration, Surgical or endovascular intervention, Thrombosis/ occlusion of the stent.

See the Instructions for Use provided with the product for a complete list of warnings, precautions, adverse events, and device information.

EverFlex[™] Self-expanding Peripheral Stent with Entrust[™] **Delivery System**

Indication: The EverFlex™ Self-Expanding Peripheral Stent with Entrust™ Delivery System is intended to improve luminal diameter in the treatment of symptomatic de-novo or restenotic lesions up to 140 mm in length in the native Superficial Femoral Artery (SFA) and/or proximal popliteal arteries with reference vessel

diameters ranging from 4.5 mm-7.5 mm.

Contraindications: Use of the EverFlex™ Self-Expanding Peripheral Stent with Entrust™ Delivery System is contraindicated in patients with known hypersensitivity to nickel titanium; patients contraindicated for anticoagulant and/or antiplatelet therapy; patients who have a lesion that prevents complete inflation of an angioplasty balloon or proper placement of the stent or stent delivery system. The EverFlex™ Self-Expanding Peripheral Stent with Entrust™ Delivery System.

Delivery System is contraindicated for use in the carotid artery.

Potential Adverse Events: Potential adverse events which may be associated with the use of a stent in the SFA and proximal popliteal arteries include, but are not limited to: Allergic reaction, Amputation, Artery perforation or rupture, Bleeding requiring transfusion, Infection, Pseudoaneurysm, Restenosis, Stent collapse or fracture, Stent migration, Surgical or endovascular intervention, Thrombosis/ occlusion of the stent.

See the Instructions for Use provided with the product for a complete list of warnings, precautions, adverse events, and device information.

Fortrex™ 0.035" PTA Balloon Catheter

Indications for Use: The Fortrex[™] 0.035" OTW PTA balloon catheter is intended to dilate stenoses in the iliac, femoral, iliofemoral, popliteal, infra-popliteal, and renal arteries, and for the treatment of obstructive lesions of native or synthetic arteriovenous dialysis fistulae. This device is also indicated for stent post-dilatation in the peripheral vasculature.

Goose Neck[™] Microsnare

Indications for Use: The Amplatz Goose Neck microsnare kit is intended for use in the retrieval and manipulation of atraumatic foreign bodies located in the coronary and peripheral cardiovascular system and the extracranial neurovascular anatomy.

Goose Neck[™] Snare

Indications for Use: The Amplatz Goose Neck snare is intended for use in the cardiovascular system or hollow viscus to retrieve and manipulate foreign objects. Manipulation procedures include indwelling venous catheter repositioning, indwelling venous catheter fibrin sheath stripping, and central venous access venipuncture procedure assistance.

HawkOne™ Directional Atherectomy System

Indications for Use: The HawkOne™ peripheral directional atherectomy system is intended for use in atherectomy of the peripheral vasculature. The HawkOne catheter is indicated for use in conjunction with the SpiderFX embolic protection device in the treatment of severely calcified lesions. The HawkOne catheter is NOT intended for use in the coronary, carotid, iliac, or renal vasculatures.

Important Information: Indications, contraindications, warnings, and instructions for use can be found in the product labeling supplied with each device. CAUTION: Federal (USA) law restricts these products for sale by or on the order of a physician.

IN.PACT™ Admiral™ Drug-Coated Balloon Indications for Use: The IN.PACT™ Admiral™ Paclitaxel-coated PTA Balloon Catheter is indicated for percutaneous transluminal angioplasty, after appropriate vessel preparation, of *de novo*, restenotic, or in-stent restenotic lesions with lengths up to 360 mm in superficial femoral or popliteal arteries with reference vessel diameters of 4-7 mm.

Contraindications

The IN.PACT Admiral DCB is contraindicated for use in:

- Coronary arteries, renal arteries, and supra-aortic/cerebrovascular arteries Patients who cannot receive recommended antiplatelet and/or anticoagulant
- therapy

 Patients judged to have a lesion that prevents complete inflation of an angioplasty balloon or proper placement of the delivery system

Patients with known allergies or sensitivities to paclitaxel

Women who are breastfeeding, pregnant or are intending to become pregnant or men intending to father children. It is unknown whether paclitaxel will be excreted in human milk and whether there is a potential for adverse reaction in nursing infants from paclitaxel exposure.

Warnings

- A signal for increased risk of late mortality has been identified following the use of paclitaxel-coated balloons and paclitaxel-eluting stents for femoropopliteal arterial disease beginning approximately 2-3 years post-treatment compared with the use of non-drug coated devices. There is uncertainty regarding the magnitude and mechanism for the increased late mortality risk, including the impact of repeat paclitaxel-coated device exposure. Physicians should discuss this late mortality signal and the benefits and risks of available treatment options with their patients.
- Use the product prior to the Use-by Date specified on the package Contents are supplied sterile. Do not use the product if the inner packaging is
- damaged or opened.
- Do not use air or any gaseous medium to inflate the balloon. Use only the recommended inflation medium (equal parts contrast medium and saline
- solution).

 Do not move the guidewire during inflation of the IN.PACT Admiral DCB.

 Do not exceed the rated burst pressure (RBP). The RBP is 14 atm (1419 kPa) for all balloons except the 200 and 250 mm balloons. For the 200 and 250 mm balloons the RBP is 11 atm (1115 kPa). The RBP is based on the results of in vitro testing. Use of pressures higher than RBP may result in a ruptured balloon with possible intimal damage and dissection.
- The safety and effectiveness of using multiple IN.PACT Admiral DCBs with a total drug dosage exceeding $34,854\,\mu g$ of paclitaxel in a patient has not been clinically evaluated.

- This product should only be used by physicians trained in percutaneous transluminal angioplasty (PTA).
- This product is designed for single patient use only. Do not reuse, reprocess, or resterilize this product. Reuse, reprocessing, or resterilization may compromise the structural integrity of the device and/or create a risk of contamination of the device, which could result in patient injury, illness, or
- Assess risks and benefits before treating patients with a history of severe reaction to contrast agents.
 • The safety and effectiveness of the IN.PACT Admiral DCB used in conjunction
- with other drug-eluting stents or drug-coated balloons in the same procedure or following treatment failure has not been evaluated.
- The extent of the patient's exposure to the drug coating is directly related to the number of balloons used. Refer to the *Instructions for Use* (IFU) for details regarding the use of multiple balloons and paclitaxel content.
- The use of this product carries the risks associated with percutaneous transluminal angioplasty, including thrombosis, vascular complications, and/or bleeding events
- Vessel preparation using only pre-dilatation was studied in the clinical study. Other methods of vessel preparation, such as atherectomy, have not been studied clinically with IN.PACT Admiral DCB.

 This product is not intended for the expansion or delivery of a stent.

Potential Adverse Effects The potential adverse effects (e.g. complications) associated with the use of the device are: abrupt vessel closure; access site pain; allergic reaction to contrast medium, antiplatelet therapy, or catheter system components (materials, drugs, and excipients); amputation/loss of limb; arrhythmias; arterial aneurysm; arterial thrombosis; arteriovenous (AV) fistula; death; dissection; embolization; fever; hematoma; hemorrhage; hypotension/hypertension; inflammation; ischemia or infarction of tissue/organ; local infection at access site; local or distal embolic events; perforation or rupture of the artery;

pseudoaneurysm; renal insufficiency or failure; restenosis of the dilated artery; sepsis or systemic infection; shock; stroke; systemic embolization; vessel spasms or recoil; vessel trauma which requires surgical repair.

Potential complications of peripheral balloon catheterization include, but are not limited to the following: balloon rupture; detachment of a component of the balloon and/or catheter system; failure of the balloon to perform as intended; failure to cross the lesion.

Although systemic effects are not anticipated, potential adverse events that may be unique to the paclitaxel drug coating include, but are not limited to: allergic/immunologic reaction; alopecia; anemia; gastrointestinal symptoms; hematologic dyscrasia (including leucopenia, neutropenia, thrombocytopenia); hepatic enzyme changes; histologic changes in vessel wall, including inflammation, cellular damage, or necrosis; myalgia/arthralgia; myelosuppression; peripheral neuropathy.

Refer to the Physician's Desk Reference for more information on the potential adverse effects observed with paclitaxel. There may be other potential adverse effects that are unforeseen at this time.

Please reference appropriate product Instructions for Use for a detailed list of indications, warnings, precautions and potential adverse effects. This content is available electronically at www.manuals.medtronic.com.

CAUTION: Federal (USA) law restricts this device to sale by or on the order of a physician.

IntraStent™ Biliary Stent System
Indications for Use: The stent is intended as a palliative treatment of malignant neoplasms in the biliary tree.
WARNING: The safety and effectiveness of this device for use in the vascular

system have not been established.

Launcher™ Peripheral Guide CatheterIndications for Use: The Launcher™ Peripheral Guide Catheter is designed to provide a pathway through which therapeutic devices are introduced. The guiding catheter is intended to be used in the coronary or peripheral vascular svstem.

WARNINGS

- For single patient use only. Do not reuse, reprocess, or resterilize this product. Reuse, reprocessing, or resterilization may compromise the structural integrity of the device and/or create a risk of contamination of the device, which could result in patient injury, illness, or death. Cleaning, disinfection, and resterilization may compromise the essential material and design characteristics of the device leading to device failure.
- Do not use if package is opened or damaged.
 Due to the size and relative stiffness of the guiding catheters, extreme care must be taken to avoid damage to the wall of the vessels through which this
- catheter passes.

 Due to the size of the non-tapered tip, this catheter may occlude smaller vessels. Care must be taken not to completely block flow.

 When there is limited clearance between devices and the guide catheter
- lumen, devices must be advanced and withdrawn slowly with the valve open to reduce the risk of embolism.
- Use catheters prior to the expiration date specified on the package.

- The large internal diameter of the catheter permits injection with little force being required on the syringe. Inject slowly whenever attempting to opacify the vessels via this catheter.
- Guiding Catheters are designed for use by physicians engaged in the practice of a specialized branch of medicine. Use of these devices should be restricted to those specialists trained to perform the procedure.

 This device has been delivered STERILE. Careful inspection prior to use should
- verify the size, shape, and condition of the catheter as suitable for the specific procedure.
- Store catheters straight in a cool, dark area. Do not expose catheters to solvents or ionizing radiation.
- If resistance is encountered at any time during the insertion of the interventional device through the lumen of the guiding catheter, do not force passage. Determine the cause of resistance before proceeding. If the cause of resistance cannot be determined, remove the entire dilatation system.
- If the guide catheter is torqued when kinked, it may cause damage that could result in separation along the catheter shaft. In the event the catheter shaft becomes kinked, withdraw the guide catheter, guidewire, and catheter sheath
- introducer.

 After use, this product may be a potential biohazard. Handle and dispose of in accordance with accepted medical practice and applicable local, state, and federal laws and regulations.

Important Information: Indications, contraindications, warnings, and instructions for use can be found in the product labeling supplied with each device. CAUTION: Federal (USA) law restricts these products for sale by or on the order of a physician.

Adverse effects

Use of Guiding Catheters may give rise to the following complications:

- Hemorrhage or Hematoma
- Allergic reaction to contrast medium
- Infection
- Embolism
- Vessel or heart dissection, perforation
- Vessel spasm
- Thrombosis
- Myocardial infarction
- Stroke
- Death
- Vascular occlusion

MicroMewi™ Infusion Catheter

Indications for Use: The Micro Therapeutics Infusion Catheter is intended to be used for the controlled, selective infusion of physician-specified pharmacologic agents or radiopaque contrast media into the general vasculature. All pharmacologic agents utilized with the Micro Therapeutics Infusion Catheter should be fully prepared and used according to the instructions for use of the specific pharmacologic agent. The Micro Therapeutics Infusion Catheter is not intended for coronary, pediatric, or neonatal use.

Mo.Ma™ Ultra Cerebral Protection Device

Mo.Ma Ottra Cerebral Protection Device is Indications for Use: The Mo.Ma™ Ultra Proximal Cerebral Protection Device is indicated as an embolic protection system to contain and remove embolic material (thrombus/debris) while performing angioplasty and stenting procedures involving lesions of the internal carotid artery and/or the carotid bifurcation.

The reference diameter of the external carotid artery should be between $3-6\,\mathrm{mm}$ and the reference diameter of the common carotid artery should be between $5-13\,\mathrm{mm}$.

Test data is on file at Medtronic Inc.

Bench test results may not be indicative of clinical performance

NanoCross™ Elite 0.014" PTA Balloon Catheter
Indications for Use: The NanoCross™ Elite 0.014" Over-the-Wire PTA Balloon
Dilatation Catheter is intended to dilate stenoses in the iliac, femoral,
iliofemoral, popliteal, infra-popliteal, and renal arteries, and for the treatment of obstructive lesions of native or synthetic arteriovenous dialysis fistulae. This device is also indicated for stent post-dilatation in the peripheral vasculature.

Nitrex[™] Guidewire

Indications for Use: The 0.014 in. (0.36 mm) and 0.018 in. (0.46 mm) diameter NITREX Nitinol Guidewires are intended for use in the peripheral and coronary vasculature. The 0.025 in. (0.64 mm) and 0.035 in. (0.89 mm) diameter NITREX Nitinol Guidewires are indicated for use in the peripheral vasculature.

Pacific™ Plus 0.018" PTA Balloon Catheter

The Pacific Plus PTA Catheter is intended to dilate stenoses in the iliac, femoral, iliofemoral, popliteal, infrapopliteal, and renal arteries; and for the treatment of obstructive lesions of native or synthetic arteriovenous dialysis fistulae. WARNING: Prior to use, refer to the Instructions for Use supplied with these devices for indications, contraindications, side effects, suggested procedure, warnings, and precautions.

Warnings, and precadions.

Warning: Do not exceed the rated burst pressure.

CAUTION: Larger models of the Pacific™ Plus PTA catheter may exhibit slower deflation times, particularly on long catheter shafts.

Potential Adverse Events: Possible adverse events associated with use of the

Pacific[™] Plus PTA Catheter include, but are not limited to, complications related to puncture such as, but not limited to, local hematoma, infection and hemorrhage; dilatation related complications including, but not limited to, dissection, perforation and restenosis; angiography related complications such as, but not limited to, hypotension, drug/allergic reactions, and death. Test data is on file at Medtronic Inc.

Bench test results may not be indicative of clinical performance.

Pacific™ Xtreme™ 0.018" PTA Balloon Catheter

Indications for Use: The PACIFIC XTREME™ PTA Balloon Dilatation Catheter in 150 mm, 200 mm, 250 mm, and 300 mm balloon length is intended to dilate stenoses in femoral, popliteal, and infrapopliteal arteries. Test data is on file at Medtronic Inc.

Bench test results may not be indicative of clinical performance

ProStream™ Infusion Wires

Indications for Use: The ProStream™ Multiple Sidehole Infusion Wire is intended to be used for the controlled, selective infusion of physician-specified pharmacologic agents or radiopaque contrast media into the general vasculature. All pharmacologic agents utilized with the ProStream Multiple Sidehole Infusion Wire should be fully prepared and used according to the instructions for use of the specific pharmacologic agent. The ProStream Multiple Sidehole Infusion Wire is not intended for coronary or neurovascular use.

Protégé™ GPS™ Self-expanding Peripheral and Biliary Stent System Indication: The Protégé™ GPS™ Self-Expanding Peripheral Stent Systems is indicated for improving luminal diameter in patients with atherosclerotic disease of the common and/or external iliac arteries up to and including 100 mm in length, with reference vessel diameters of 7.5-11 mm. The stent is intended as a palliative treatment of malignant neoplasms in the biliary tree.

Contraindications: Use of the Protégé™ GPS™ Self-Expanding Peripheral Stent System is contraindicated in patients with known hypersensitivity to nickel titanium; patients contraindicated for anticoagulant and/or antiplatelet therapy; patients who have a lesion that prevents complete inflation of an angioplasty balloon or proper placement of the stent or stent delivery system.

Potential Adverse Events: Potential adverse events which may be associated with the use of a stent in the common and/or external iliac arteries include, but are not limited to: Abrupt or sub-acute closure, Allergic reaction to device materials or procedure medications, Allergic reaction to Nitinol, Amputation, Aneurysm, Angina, Arrhythmia, Arterio-venous fistula, Artery injury (e.g., dissection, perforation, or rupture), Bleeding requiring transfusion, Bruising, Contrast medium reaction/renal Failure, Death, Device breakage, Edema, Embolism, Failure to deploy stent, Fever, Gastrointestinal bleeding due to Anticoagulation, Hematoma, Hypertension/Hypotension, Infection, Inflammation, Intraluminal thrombus, Myocardial infarction Pain, Partial stent deployment, Pseudoaneurysm, Renal failure, Renal insufficiency, Restenosis, Sepsis, Shock, Stent collapse or fracture, Stent migration, Stent misplacement, Stroke, Surgical or endovascular Intervention, Thrombosis/occlusion of the stent, Transient ischemic attack, Venous thromboembolism, Vessel spasm, Worsening claudication or rest, pain. See the Instructions for Use provided with the product for a complete list of warnings, precaution, adverse events, and device information.

Protégé™ RX Self-expanding Carotid Stent System

with the Medtronic embolic protection system, is indicated for the treatment of patients at high risk for adverse events from carotid endarterectomy who require percutaneous carotid revascularization and meet the following criteria: 1. Patients with carotid artery stenosis (≥ 50% for symptomatic patients by ultrasound or angiography or ≥ 80% for asymptomatic patients by ultrasound or angiography) of the Common or Internal Carotid Artery, AND 2. Patients must have a reference vessel diameter within the range of 4.5 mm and 9.5 mm at the target lesion.

Contraindications: Use of the Protégé RX Carotid Stent System is contraindicated under these circumstances: Patients in whom anticoagulant, antiplatelet therapy or thrombolytic drugs is contraindicated; patients with vascular tortuosity or anatomy, which precludes the safe introduction of the sheath, guide catheter, embolic protection system, or stent system; patients with known hypersensitivity to nickel-titanium; patients with uncorrected bleeding disorders; lesions in the ostium of the common carotid artery. WARNING: Only physicians who have received appropriate training and are familiar with the principles, clinical applications, complications, side effects and hazards commonly associated with carotid interventional procedures should use this device Potential Adverse Events: Potential adverse events which may be associated with the use of a stent in the carotid arteries include, but are not limited to: Abrupt closure, Allergic reactions to procedural medications, contrast dye or device materials, Amaurosis fugax, Aneurysm, Angina/coronary ischemia, Arrhythmia, Arterial occlusion or thrombosis at puncture site or remote site, Arteriovenous fistula, Bacteremia or septicemia, Bleeding from anticoagulant or antiplatelet medications, Bleeding, with or without transfusion, Cerebral edema, Cerebral hemorrhage, Cerebral ischemia or transient ischemia attack (TIA), Congestive heart failure (CHF), Death, Detachment of a component of the device system, Embolism (air, tissue, thrombus), Emergent or urgent endarterectomy surgery (CEA), Fever, Filter thrombosis or occlusion, Fluid overload, Groin hematoma, with or without surgical repair, Hemorrhage, with or without transfusion, Hyperperfusion syndrome, Hypotension or hypertension, Infection and/or pain at the puncture site, Ischemia or infarction of tissue/organ, Myocardial infarction (MI), Pain (head, neck), Pseudoaneurysm, Renal failure/insufficiency (new or worsening), Restenosis of stented segment, Seizure, Severe unilateral headache, Slow/no flow during procedure, Stent/filter collapse or fracture, Stent/filter entanglement or damage, Stent/filter failure to deploy, Stent embolization, migration, or misplacement, Stent or vessel thrombosis/occlusion, Stroke/cerebrovascular accident (CVA), Total occlusion of carotid artery, Vessel dissection, flap, perforation, or rupture, Vessel spasm or recoil.

Important Information: Indications, contraindications, warnings, and instructions for use can be found in the product labeling supplied with each device. CAUTION: Federal (USA) law restricts these products for sale by or on the order of a physician.

RapidCross™ 0.014" Rapid Exchange PTA Balloon Catheter Indications for Use: The RapidCross™ PTA Rapid Exchange Balloon Dilatation Catheter is intended to dilate stenoses in the iliac, femoral, iliofemoral, popliteal, infra-popliteal, and renal arteries, and for the treatment of obstructive lesions of native or synthetic arteriovenous dialysis fistulae. This device is also indicated for stent post-dilatation in the peripheral vasculature.

Sequel[™] Rotating Double Y-Connector

Indications for Use: The Sequel" Rotating Y-connector is designed for use during Percutaneous Transluminal Coronary Angioplasty (PTCA) and other intravascular therapeutic procedures that utilize a guiding catheter. The Y-connector provides a means for inserting guidewires or catheters into the vasculature, and positioning and locking them into place. Turning the thumb wheel prevents blood loss and catheter movement.

SilverHawk™ Plaque Excision System

Indications for Use: The SilverHawk™ Peripheral Plaque Excision System is intended for use in atherectomy of the peripheral vasculature. The catheter is NOT intended for use in the coronary, carotid, iliac, or renal vasculature.

SpiderFX[™] Embolic Protection Device

Indications for Use: Lower Extremity (LE) Interventions
The SpiderFX™ Embolic Protection Device is indicated for use as a guidewire and embolic protection system to contain and remove embolic material in conjunction with the TurboHawk™ Peripheral Plaque Excision System, either during standalone procedures or together with PTA and/or stenting, in the treatment of severely calcified lesions in arteries of the lower extremities. The vessel diameter at the filter basket placement site should be between 3.0 mm and 6.0 mm.

Carotid Interventions

The SpiderFX Embolic Protection Device is indicated for use as a guidewire and embolic protection system to contain and remove embolic material (thrombus/ debris) while performing angioplasty and stenting procedures in carotid arteries. The diameter of the artery at the site of filter basket placement should be between 3.0 mm and 7.0 mm.

Saphenous Vein Graft (SVG) Interventions

The SpiderFX Embolic Protection Device is indicated for use as an embolic protection system to contain and remove embolic material (thrombus/debris). The device also acts as the guidewire while performing percutaneous transluminal coronary angioplasty or stenting procedures in coronary saphenous vein bypass grafts with reference vessel diameters of 3.0 mm to 6.0 mm. The safety and effectiveness of this device as an embolic protection system has not been established in the cerebral vasculature.

TrailBlazer™ Support Catheter Indications for Use: TrailBlazer™ Support Catheters are percutaneous, single-lumen catheters designed for use in the peripheral vascular system.

TrailBlazer™ Support Catheters are intended to guide and support a guidewire during access of the vasculature, allow for wire exchanges, and provide a conduit for the delivery of saline solutions or diagnostic contrast agents.

TrailBlazer™ Angled Support Catheter
Indications for Use: TrailBlazer™ Angled Support Catheters are
percutaneous, single-lumen catheters designed for use in the peripheral
vascular system. TrailBlazer™ Support Catheters are intended to guide and support a guide-wire during access of the vasculature, allow for wire exchanges, and provide a conduit for the delivery of saline solutions or diagnostic contrast

TurboHawk[™] Plaque Excision System

intended for use in the atherectomy of the peripheral vasculature. The TurboHawk catheter is NOT intended for use in the coronary, carotid, iliac, or renal vasculature. The TurboHawk Catheter is indicated for use in conjunction with the SpiderFX $^{"}$ Embolic Protection Device in the treatment of severely calcified lesions (LS-C and LX-C only).

Viance[™] Crossing Catheter

Indications for Use: The Viance™ Catheter is intended for use with a guidewire to access discrete regions of the peripheral vasculature. When used as part of the Peripheral System, the Viance Catheter is indicated for use to facilitate the intraluminal placement of conventional guidewires beyond stenotic peripheral lesions (including chronic total occlusions) prior to placement of other interventional devices.

Visi-Pro™ Balloon-expandable Peripheral Stent System

Indications: The Visi-Pro™ Balloon-expandable Peripheral Stent System is indicated for improving luminal diameter in patients with atherosclerotic disease of the common and/or external iliac arteries up to 100 mm in length, with a reference vessel diameter of 5 to 10 mm. The Visi-Pro[®] Balloon-expandable Biliary Stent System is intended as a palliative treatment

of malignant neoplasms in the billary tree.

Contraindications: Use of the Visi-Pro™ Balloon-expandable Peripheral Stent

System is contraindicated in patients with known hypersensitivity to stainless steel or its components; patients contraindicated for anticoagulant and/or antiplatelet therapy; patients who exhibit persistent acute intraluminal thrombus of the proposed lesion site; perforation at the angioplasty site; aneurysm of the artery to be treated. All of the customary contraindications

Potential Adverse Events: Potential adverse events which may be associated with the use of a stent in the Iliac arteries include, but are not limited to: Abrupt or sub-acute closure, Allergic reaction to 316L stainless steel, Allergic reaction to device materials or procedure medications. Amputation, Aneurysm, Angina, Arrhythmia, Arterio-venous fistula, Artery injury (e.g., dissection, perforation or rupture), Bleeding requiring transfusion, Contrast medium reaction/renal failure, Death Device breakage, Embolism, Failure to deploy stent, Fever, Gastrointestinal bleeding due to anticoagulation, Hematoma, Hypertension/ Hypotension, Infection, Inflammation, Intraluminal thrombus, Myocardial infarction, Pain, Partial stent deployment, Pseudoaneurysm, Renal insufficiency, Restenosis, Sepsis, Shock, Stent collapse or fracture, Stent migration, Stent misplacement, Stroke, Surgical or endovascular intervention, Thrombosis/occlusion of the stent, Transient increase in glomerular filtration rate, Transient ischemic attack, Venous thromboembolism, Vessel spasm, Worsening claudication or rest pain.

See the Instructions for Use provided with the product for a complete list of warnings, precautions, adverse events, and device information.

Wholey[™] Guidewire System

Indications for Use: The Wholey™ guidewire system is intended to facilitate the placement and exchange of interventional devices during diagnostic or therapeutic interventional procedures. The guidewire can be torqued to facilitate navigation through tortuous arteries and/or avoid unwanted side branches.

Medtronic

Aortic | **Peripheral** | endoVenous 3033 Campus Drive, N550 Plymouth, MN 55441 USA

24-hour Technical Support Toll free: +1.800.328.2518

Orders
Tel: +1.763.514.8510
Toll free: +1.800.716.6700
Fax: +1.877.697.4841
Email: rs.pvnvorders@medtronic.com

Cardio Vascular LifeLine Customer Support
Tel: +1.763.526.7890
Toll free: +1.877.526.7890

medtronic.com/peripheral

 $UC201802679b\ EN@\ 2019\ Medtronic.\ All\ rights\ reserved.\ Medtronic,\ Medtronic\ logo,\ and\ Further. Together\ are\ trademarks\ of\ Medtronic.\ All\ other\ brands\ are\ trademarks\ of\ a Medtronic\ company.\ {}^{mt}$ Third party\ brands\ are\ trademarks\ of\ their\ respective\ owners.\ Wholey is\ a\ trademark\ of\ Mark\ H.\ Wholey\ used\ under\ license.\ For\ distribution\ in\ the\ USA\ only.\ 09/2019