STEP-BY-STEP

GUIDE

ReliaTack[™]
Articulating Reloadable
Fixation Device






LOADING

Before loading, the ReliaTack[™] device must be in reload mode, with the red toggle button exposed.



Ensure that the device is in the straight, unarticulated position.

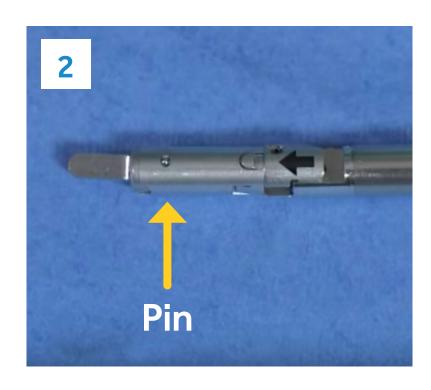


Pin must be in the vertical position. If not vertical, push the red fire button, cycle the device until the pin is vertical, and push the green load button once vertical.




Remove the reload from the blister by grabbing the distal end of the reload and lifting up. Important: Do not grab the shipping wedge.




Pull and hold the blue lock switch button in the back position.

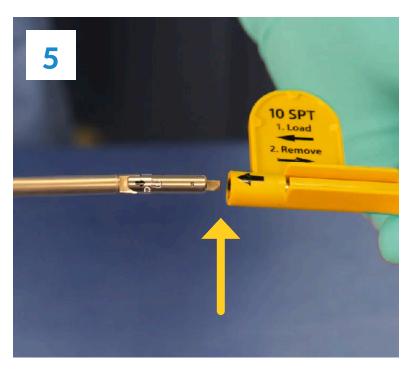


Hold the blue lock switch button and insert the pin located at the distal end of the shaft into the reload.

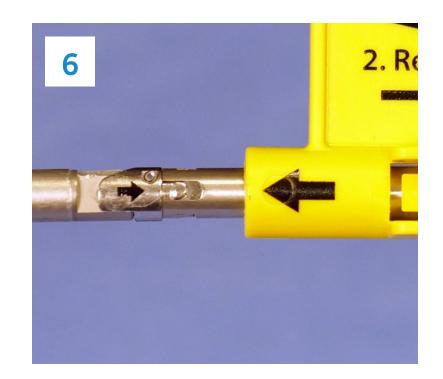

Ensure that the arrow on the shaft aligns with the shipping wedge arrow. Push the reload onto the distal end of the shaft until the two arrows meet.

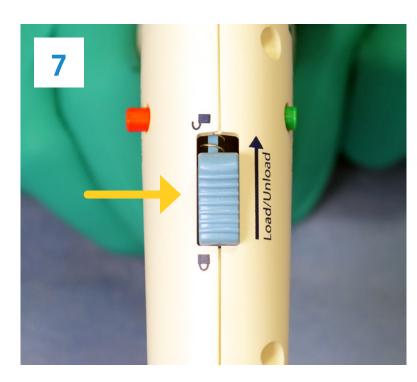


Release the blue lock switch button, allowing it to return to the forward position.

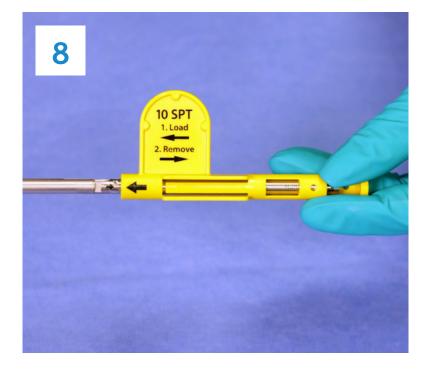

Gently pull on the reload to confirm that the device is loaded.




Remove the shipping wedge once the reload is properly locked and loaded.

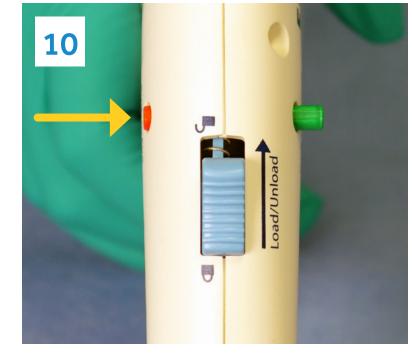

Push the red fire button and hand the device to the surgeon.

UNLOADING

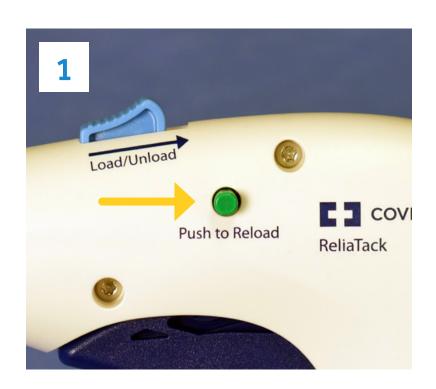

Push the green load button to expose the red portion of the toggle button and ensure the device is in the straight position.



Pull and hold the blue lock switch button in the back position.



Pull the reload off of the shaft of the device and discard.

Warning: Do not reuse.

HERNIA CARE

Mesh. Fixation. Permacol[™]. Dissection.

Our comprehensive product portfolio can enhance your hernia repair procedures.

Always refer to the instructions for use included with the product for complete indications, contraindication, warnings, and precautions.

555 Long Wharf Drive New Haven, CT 06511

800.722.8772 508.261.8000

medtronic.com/reliatack



STEP-BY-STEP GUIDE

ReliaTack[™] Articulating Reloadable Fixation Device






LOADING

Before loading, the ReliaTack[™] device must be in reload mode, with the red toggle button exposed.



Ensure that the device is in the straight, unarticulated position.




Pin must be in the vertical position. If not vertical, push the red fire button, cycle the device until the pin is vertical, and push the green load button once vertical.




Remove the reload from the blister by grabbing the distal end of the reload and lifting up. Important: Do not grab the shipping wedge.




Pull and hold the blue lock switch button in the back position.



Hold the blue lock switch button and insert the pin located at the distal end of the shaft into the reload.



Ensure that the arrow on the shaft aligns with the shipping wedge arrow. Push the reload onto the distal end of the shaft until the two arrows meet.




Release the blue lock switch button, allowing it to return to the forward position.



Gently pull on the reload to confirm that the device is loaded.



Remove the shipping wedge once the reload is properly locked and loaded.



Push the red fire button and hand the device to the surgeon.



Push the green load button to expose the red portion of the toggle button and ensure the device is in the straight position.



Pull and hold the blue lock switch button in the back position.



Pull the reload off of the shaft of the device and discard.

Warning: Do not reuse.

HERNIA CARE

Mesh. Fixation. Permacol™. Dissection.

Our comprehensive product portfolio can enhance your hernia repair procedures.

 $Always \ refer to \ the \ instructions \ for \ use \ included \ with \ the \ product \ for \ complete \ indications, \ contraindication, \ warnings, \ and \ precautions.$

555 Long Wharf Drive New Haven, CT 06511 800.722.8772 508.261.8000

medtronic.com/reliatack

