



## Conductive Hearing Loss

The conductive component is bypassed with an Alpha 2 MPO ePlus™ system. The greater the Air-Bone gap, the greater the functional gain that can be expected.

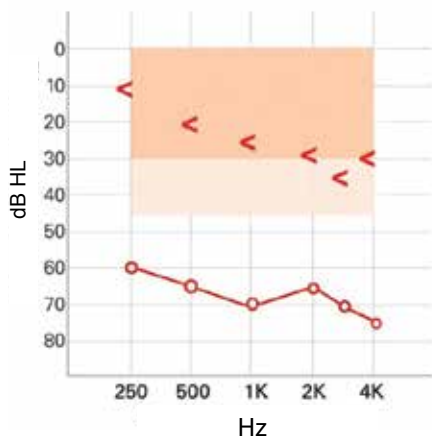

## Mixed Hearing Loss

The Alpha 2 MPO ePlus™ sound processor is approved for up to 45 dB hearing loss with ideal candidacy up to 35 dB. Patients with hearing loss greater than 35 dB candidacy should be carefully evaluated for the Alpha 2 MPO ePlus™ system.

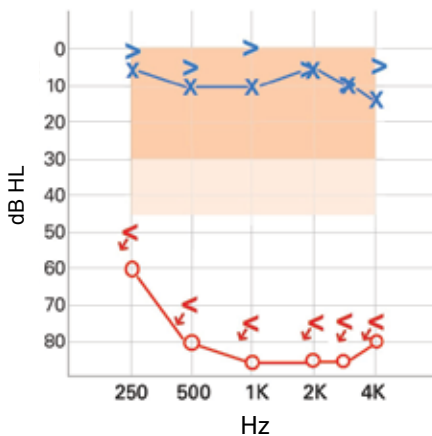

## Single-Sided Deafness (SSD)

The better ear should have normal hearing ( $\leq 20$  dB). Sound is received on the poorer hearing side and is then transferred to the better functioning cochlea on the opposite side. This configuration eliminates the head shadow effect.

## Candidacy Evaluation

- Pure-tone audiometry (BC and AC, recommended 0.5, 1, 2, and 3 KHz)
- Speech audiometry
- Sound field candidacy evaluation with headband/softband
- Consider age appropriate audiometry testing such as play audiometry and VRA
- Ensure patients are counselled appropriately and have realistic expectations

Rx only. Refer to product instruction manual/package insert for instructions, warnings, precautions and contraindications.

For further information, please call Medtronic ENT at 800.874.5797 or consult Medtronic's website at [www.medtronic.com/ent](http://www.medtronic.com/ent).

## Medtronic

### Medtronic ENT

6743 Southpoint Drive N  
Jacksonville, FL 32216  
USA  
Toll free: (800) 874-5797  
Telephone: (904) 296-9600  
Fax: (800) 678-3995

### International Telephone Numbers

**Europe HQ** Switzerland 41-21-802-7000  
**Latin America HQ** 305-500-9328  
Adriatic Region 385-1-488-1120  
Argentina 54-11-4898-5700  
Australia 1-800-668-670  
Baltic Region 37-1-67560226  
Belgium 32-2456-09-09  
Brazil 55-11-2182-9200  
Canada 1-800-268-5346  
Chile 56-2-2655-5110  
China 86-10-5869-8989  
Colombia 57-1-742-7300  
Czech Republic 420-233-059-111  
France 33-470-679-800  
Germany 49-2159-8149-353  
Greece 30-210-67-79-099  
HongKong 852-2919-1300  
Hungary 36-188-90600

India 91-22-33074700  
Israel 972-9-972-4400  
Italy 39-02-24137-324  
Japan 81-3-6774-4611  
Korea 82-2-3404-3600  
Lebanon 961-1-370-670  
Luxembourg 32-2456-09-09  
Malaysia 60-37-953-4800  
Mexico 52-55-11-02-90-30  
Netherlands 31-45-566-8800  
Poland 48-22-4656900  
Russian Fed. 7-495-580-73-77  
Singapore 65-6436-5000  
South Africa 27-11-260-9300  
Spain 34-91-625-05-40  
Taiwan 886-2-2183-6000  
Thailand 662-232-7400  
UK 44-1923-205-166